

	<p>Tc max=105°C Risk group(EN 62471:2008)=1</p>	<p>General safety instructions: information on restrictions related to use of the light fixtures (class, IP, etc), can be found both on the fixture label and on our website at www.rovasi.com.</p> <p>The wiring schematics can be found on page 2 of the document.</p> <p>ELECTRONIC EQUIPMENT:</p> <p>S: On/Off. D: DALI/DSI/switchDIM/corridorFUNCTION. B: Bluetooth Casambi.</p> <p>ACCESSORIES</p>	<p>17W / 500mA</p> <p>911MOV.1-T869 911MOV.1-T870 911MOV.1-T871 911MOV.1-T872 911MOV.1-T873 911MOV.1-T874</p>
--	---	---	---

	<p>4</p> <p>A</p> <p>A</p> <p>L1 L2 L3</p>	<p>5</p> <p>M5x12 x2</p> <p>M3x6 x2</p>	
--	--	---	--

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that its still the mostup to date reference. Updated data will be supplied on request. [30.04.2021]

Installation instructions. Mains supply wires

- Wiring type and cross section
- The wiring can be stranded wires with ferrules or solid with a cross section of 0.2-0.5mm².
- Strip 8.5-9.5mm of insulation from the cables to ensure perfect operation of the push-wire terminals.
- Use one wire for each terminal connector only.
- Use each strain relief channel for one cable only.
- Installation may require advice from a qualified person.
- Single lights apt for inner use (no outer)


Wiring guidelines

- All connections must be kept as short as possible to ensure good EMI.
- Max. length of output wires is 200mm. Secondary switching is not permitted.
- Incorrect wiring can damage LED modules.




Release of the wiring
Press down the "push button"
and remove the cable from front.

Wiring diagram S: On/Off

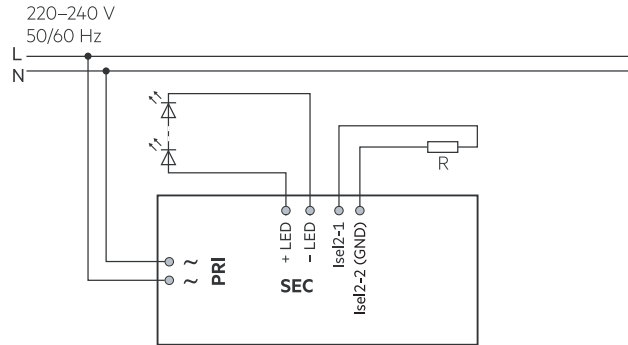

Input / Output terminal



Installation instructions. Mains supply wires

- Wiring type and cross section
- The wiring can be stranded wires with ferrules or solid with a cross section of 0.2-0.5mm².
- Strip 8.5-9.5mm of insulation from the cables to ensure perfect operation of the push-wire terminals.
- Use one wire for each terminal connector only.
- Use each strain relief channel for one cable only.
- Installation may require advice from a qualified person.
- Single lights apt for inner use (no outer)


Wiring guidelines

- All connections must be kept as short as possible to ensure good EMI.
- Max. length of output wires is 200mm. Secondary switching is not permitted.
- Incorrect wiring can damage LED modules.




Release of the wiring
Press down the "push button"
and remove the cable from front.


Wiring diagram D: DALI/DSI/SwitchDIM/corridorFUNCTION

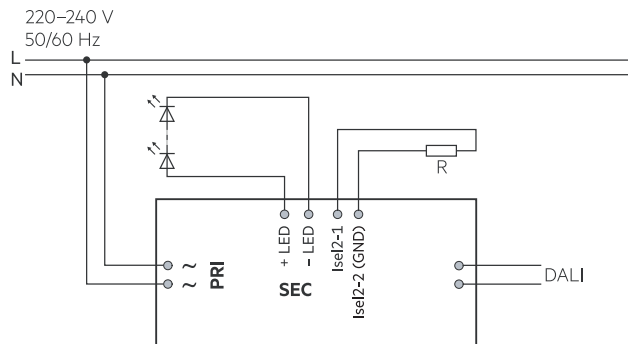

Input / Output terminal



Wiring diagram B: basicDIM Wireless

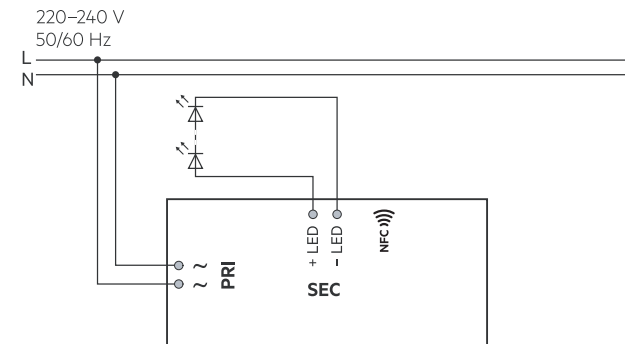

Input / Output terminal

