

108ARL.1.01-I869



Pendant downlight with symmetrical light distribution.

Cylindrical design in diameter 235mm.

Protection rating against dust and moisture: entire IP65.

Protection rating of resistance to harmful mechanical impacts: IK07.

Robust body and trim made of die-cast aluminium coated with polyester powder along with C4 treatment for corrosion resistance to guarantee further durability. Textured paint finish. Different RAL colour finishes available under request. C5-M special coating for highly corrosive environments is available under request.

Sandblasted metalized aluminium reflector.

5 mm tempered protection glass clear as standard, other finishes under request.

Polycarbonate diffuser as option to achieve IK10 protection degree.

Temperature resistant silicone rubber gasket.

Anti-condensation device.

A4 stainless steel locking screw. Optional supply of A2 stainless steel vandal-resistant screws [reference F2.A0235+F2.A1].

Built-in driver, included. Ambient temperature: up to 50°C.

Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: $PstLM \leq 1$ and $SVM \leq 0.4$.

3 hours battery available as option.

Passive temperature management: heat dissipation flows through the fixture body itself or through interior aluminium heat sink.

Cable hanger made in stainless steel 316L. Adjustable 0°, 5°, 10°, 15° or 20° to compensate for sloping catenary system..

Cable entry from the top of the fixture. Double cable gland entry for installation in series.

Leuchten Lichtstrom: 2149lm

Leuchten Anschlussleistung: 18.33 W

Leuchten Lichtausbeute: 117 lm/W

Lichtquelle Lichtstrom: 2755lm

Lichtquelle-Anschlussleistung: 17 W

Konstantstromquelle: 500 mA

Farbwiedergabeindex: >80

Ähnlichste Farbtemperatu: 2700K

Farbortoleranz: MacAdam 3

Winkel: 96°

LOR: 78%

Durchschnittliche Betriebsdauer: 50000h

Durchschnittliche Betriebsdauer: 50000h L90B10

Photobiologische Sicherheit Gruppe: 1

Cd/Klm: 417

Imax: 1149 Cd

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D

Elektronische Ausrüstung

S: On/Off (AC/DC)

SE: On/Off (AC/DC) + Battery 3h

D: DALI-2/switchDIM/corridorFUNCTION



DE: DALI-2/switchDIM/corridorFUNCTION + 3 hours battery

B: Bluetooth-Casambi [10m]

*Ein beliebiges vorgeanntes Suffix **-S**, **-SE**, **-D**, **-DE**, **-B** zur Referenz hinzufügen, um die gewünschte elektronische Ausrüstung anzugeben.

Finishes

1: RAL9010: Reinweiß **2:** RAL9005: Tiefschwarz **4:** RAL7016: Anthrazitgrau **7:** RAL9006: Weißaluminium

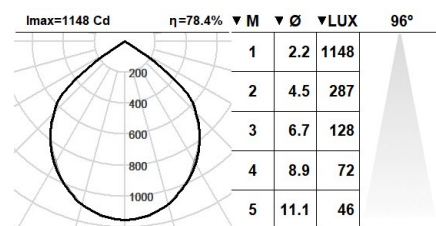

Anmerkung

Die LED-Technologie und Leistungsdaten sind einem ständigen Wandel unterworfen. Aktuelle Details müssen daher bei ROVASI nachgefragt werden, um sicherzustellen, dass die Daten aktuell sind. Aktualisierte Daten werden auf Anfrage bereitgestellt. [Letzte Revision 09.05.2025].

5 Jahre Garantie



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spanien

Kontakt

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com