MOVE 300
Surface-mounted spots

ROVASI
Positive Lighting



311MOV.1-I1140

IP20 | 850º | +RAL

Surface-mounted spots with symmetrical light distribution to achieve an effective task, accent or general lighting.
Special LED module created to be the optimal solution for specific projects.
Cylindrical design in diameter 140 mm.
Articulated arm adjustable 0º,15º, 30º, 45º, 60º, 75º and 90º and with 355º rotation around the vertical axis.
Facetted metalized or sandblasted metalized aluminium reflector.
Powder painted aluminium body and arm available in assorted finishes, customized RAL under request.
Aluminium base for attachment to the ceiling supplied with the same finish as the light fixture.
Optional anti-glare accessories for more visual comfort.
Integral driver included.
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4.
Passive temperature management: heat dissipation flows through aluminium heat sink.
Mounted to the ceiling by two fixing points.

Leuchten Lichtstrom: 3672lm
Leuchten Anschlussleistung: 33.05 W
Leuchten Lichtausbeute: 111 lm/W
Lichtquelle Lichtstrom: 4035lm
Lichtquelle-Anschlussleistung: 30 W
Konstantstromquelle: 900 mA
Farbwiedergabeindex: >90
Ähnlichste Farbtemperatu: GOLD
Farborttoleranz: MacAdam 3
Winkel: 12º
LOR: 91%
Bemessene Lebensdauer der LEDs bei Ta = 25ºC: 50000h L90B50
Photobiologische Sicherheit Gruppe: 1
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse E

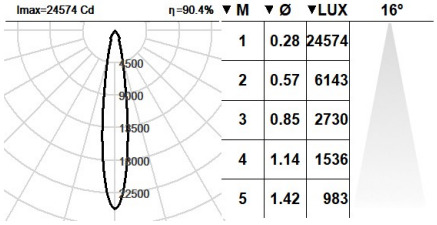

▼M	▼Ø	▼LUX	16°
1	0.28	24574	
2	0.57	6143	
3	0.85	2730	
4	1.14	1536	
5	1.42	983	

Elektronische Ausrüstung
K: On/Off (basic)
S: On/Off (AC/DC)
D: DALI-2/switchDIM/corridorFUNCTION

*Ein beliebiges vorgenanntes Suffix **-K, -S, -D** zur Referenz hinzufüge, um die gewünschte elektronische Ausrüstung anzugeben.

Finishes
1: RAL9010: Reinweiß, **2:** RAL9005: Tiefschwarz, **4:** RAL7016: Anthrazitgrau, **7:** RAL9006: Weißaluminium

Aufrüstbar, austauschbar, reparierbar





Anmerkung

Die LED-Technologie und Leistungsdaten sind einem ständigen Wandel unterworfen. Aktuelle Details müssen daher bei ROVASI nachgefragt werden, um sicherzustellen, dass die Daten aktuell sind. Aktualisierte Daten werden auf Anfrage bereitgestellt. [Letzte Revision 05.07.2025].

5 jahre garantie

CE

BSI Cert ISO 9001:2015 - nºFM 39346
BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spanien

Kontakt
T. +34 93 881 35 12
T. +34 93 881 37 13
info@rovasi.com
www.rovasi.com