MOVE 900
Track spots

ROVASI
Positive Lighting



911MOV.1-T883

IP20 | 850º | +RAL

Track spots with symmetrical light distribution to achieve an effective task, accent or general lighting.
Cylindrical design in diameter 140 mm.
Articulated arm adjustable 0º,15º, 30º, 45º, 60º, 75º and 90º and with 355º rotation around the vertical axis.
Facetted metalized or sandblasted metalized aluminium reflector.
Powder painted aluminium body and arm available in assorted finishes, customized RAL under request.
Track adaptor available in white, black or grey.
Optional anti-glare accessories for more visual comfort.
Driver built into the track adaptor. Consult compatible tracks with the track adaptor.
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4.
Passive temperature management: heat dissipation flows through aluminium heat sink.
Three-phase tracks are available as well as accessories to create a custom system.

Leuchten Lichtstrom: 3854lm
Leuchten Anschlussleistung: 25.33 W
Leuchten Lichtausbeute: 152 lm/W
Lichtquelle Lichtstrom: 4235lm
Lichtquelle-Anschlussleistung: 23 W
Konstantstromquelle: 700 mA
Farbwiedergabeindex: >80
Ähnlichste Farbtemperatu: 4000K
Farborttoleranz: MacAdam 3
Winkel: 12º
LOR: 91%

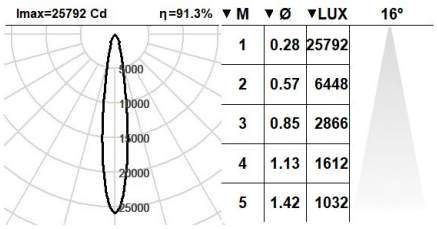

▼M	▼Ø	▼LUX	16°
1	0.28	25792	
2	0.57	6448	
3	0.85	2866	
4	1.13	1612	
5	1.42	1032	

Bemessene Lebensdauer der LEDs bei Ta = 25ºC: 50000h L90B10
Photobiologische Sicherheit Gruppe: 1
Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse D

Elektronische Ausrüstung
S: On/Off
D: DALI-2/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi

*Ein beliebiges vorgenanntes Suffix **-S, -D, -B** zur Referenz hinzufüge, um die gewünschte elektronische Ausrüstung anzugeben.

Finishes
1: RAL9010: Reinweiß, **2:** RAL9005: Tiefschwarz, **4:** RAL7016: Anthrazitgrau, **7:** RAL9006: Weißaluminium

Aufrüstbar, austauschbar, reparierbar





Anmerkung

Die LED-Technologie und Leistungsdaten sind einem ständigen Wandel unterworfen. Aktuelle Details müssen daher bei ROVASI nachgefragt werden, um sicherzustellen, dass die Daten aktuell sind. Aktualisierte Daten werden auf Anfrage bereitgestellt. [Letzte Revision 06.06.2025].

5 jahre garantie

CE

BSI Cert ISO 9001:2015 - nºFM 39346
BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spanien

Kontakt
T. +34 93 881 35 12
T. +34 93 881 37 13
info@rovasi.com
www.rovasi.com