



933KTA.1-I751



Linear downlights with three-phase track adapter. Symmetrical light distribution to achieve an effective accent, task or general lighting.
Linear fixture in 848mm length and in a width of 44mm.
Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
PMMA optics for controlling and directing the light.
Highly efficient linear printed circuit board.
Built-in driver, included.
Electronic options for lighting control: DALI-2.
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4 .
Passive temperature management.
Three-phase tracks are available as well as accessories to create a custom system.

Luminaire luminous flux: 1627lm
Luminaire connected power: 10.66 W
Luminaire efficiency: 153 lm/W
Light source luminous flux: 1750lm
Light source power: 10 W
Constant Current: 150 mA
CRI: 80
Colour Temperature: 2700K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 43°
LOR: 93%
Average Service Life: 50000h
LED reliability: >60000h L80B10
UGR: <19 under the below indicated parameters
Room dimensions X=4H/8H
Reflectance 20% | 50% | 70%
Luminaire spacing = 0.3m
Photobiological safety group: 1
Cd/Klm: 704
Imax: 1231 Cd

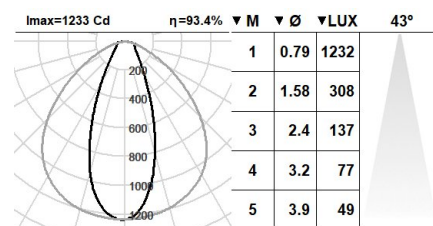

This product contains a light source of energy efficiency class D + C

Electronic Equipment

S: On/Off (AC/DC)
D: DALI-2/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi

*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 30.04.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com