


266KBR.26-I1245



Recessed ceiling mounted linear downlights with symmetrical light distribution to achieve an effective task or general lighting.

Frameless linear fixture in 1404mm length and in a width of 50mm.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.

Metallised darklight reflector in 35 cells in Copper finish designed to ensure visual comfort.

Blind covers available with a length of 280mm or its multiples: accessory reference M5.Y.

Highly efficient linear printed circuit board.

Built-in driver, included.

Electronic options for lighting control: DALI-2 or Bluetooth.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: $PstLM \leq 1$ and $SVM \leq 0,4$.

Luminaire designed according to ecodesign principles, with replaceable light source and driver, to enable upgrades, ease maintenance and extend the product lifecycle.

Passive temperature management.

Ceiling-mounted using steel support with screws. It is possible to combine different lengths and junction modules in different ways to create customized design.

Luminaire luminous flux: 2434lm

Luminaire connected power: 17,5 W

Luminaire efficiency: 139 lm/W

Light source luminous flux: 2675lm

Light source power: 14 W

Constant Current: 150 mA

CRI: 80

Colour Temperature: 3000K

Chromaticity Tolerance: MacAdam3

Beam Angle: 92°

LOR: 91%

LED reliability at nominal Ta = 25°C: 90.000h L80B10

UGR: $C0^\circ = 18,8$ | $C90^\circ = 19,1$ under the below indicated parameters

Room dimensions $X=4H/8H$

Reflectance 20% | 50% | 70%

Luminaire spacing = 0.25m

Photobiological safety group: 1

This product contains a light source of energy efficiency class C

Electronic Equipment

S: On/Off (AC/DC, NOT looping through capable)

SE: On/Off (AC/DC) + Battery 3h

D: DALI-2/switchDIM/corridorFUNCTION

DE: DALI-2/switchDIM+ 3 hours battery


DDE: DALI-2/switchDIM+ 3 hours battery (DALI)

B: Bluetooth-Casambi

*Add the suffix **-S**, **-SE**, **-D**, **-DE**, **-DDE**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

26: Black frame - copper reflector

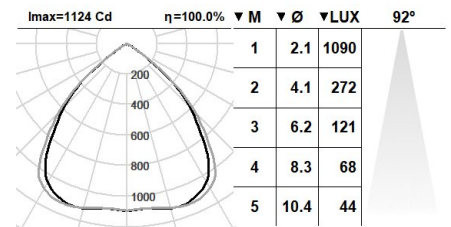

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 28.01.2026]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com