

# ADHARA OUTDOOR 600

IP65 Wall-mounted fixtures

**ROVASI**  
Positive Lighting



611ADO.04.00-I2129



Wall-mounted downlights with symmetrical light distribution.

Protection rating against dust and moisture: complete IP65.

COB protected against harmful mechanical impacts: IK10.

Lampenschirm mit 560 mm Durchmesser.

Silicone optic to control and direct the light.

Lampshade and aluminium body coated with polyester powder along with C4 treatment for corrosion resistance to guarantee further durability. Textured paint finish. Different RAL colour finishes available under request. C5-M special coating for highly corrosive environments is available under request.

Removable lampshade that can be easily replaced with another design or finish.

Built-in driver, included.

Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits:  $PstLM \leq 1$  and  $SVM \leq 0.4$ .

Temperature resistant silicone rubber gaskets.

IP67 venting valve to reduce condensation.

A4 stainless steel locking screw.

Passive temperature management: heat dissipation flows through aluminium heat sink.

Mounting to the wall through mounting plate with three fixing holes.

Cable entry from the mounting plate.

Pre-wiring of 150 mm 3x1mm<sup>2</sup>.

IP68 connector to be ordered separately [reference F3.A3 (On/Off) / F3.A5 (DALI-2)].

**Luminaire luminous flux:** 1228lm

**Luminaire connected power:** 11,9 W

**Luminaire efficiency:** 103 lm/W

**Light source luminous flux:** 1980lm

**Light source power:** 10,66 W

**Constant Current:** 350 mA

**CRI:** >80

**Colour Temperature:** 2700K

**Chromaticity Tolerance:** MacAdam 3

**Beam Angle:** 95°

**LOR:** 62%

**LED reliability at nominal Ta = 25°C:** 60.000h L90B10

**Photobiological safety group:** 1

**This product contains a light source of energy efficiency class D**

## Electronic Equipment

**S:** On/Off (AC/DC, NOT looping through capable)


**D:** DALI-2/switchDIM/corridorFUNCTION

**B:** Bluetooth-Casambi [ 15m ]

\*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

## Finishes

**04:** RAL7016: Anthracite Grey textured, **01:** RAL9010: Pure White textured, **02:** RAL9005: Jet Black textured, **07:** RAL9006: White Aluminium textured, **80:** Corten

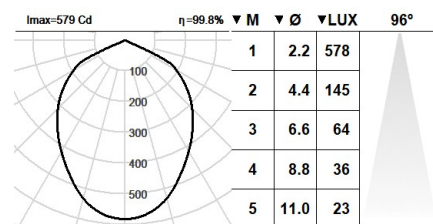

## Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 19.11.2025]

**5 years guarantee**



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

## ROVASI S.L.

Ronda de la Font Grossa, 15  
Pol. Ind. La Gavarra  
08540 Centelles | Barcelona  
Spain

## Contact

T. +34 93 881 35 12 info@rovasi.com  
T. +34 93 881 37 13 **www.rovasi.com**