



101TRG.1-R2010



Recessed ceiling-mounted downlights with symmetrical light distribution to achieve an effective task or general lighting.  
Triangular design in 216mm side.  
Protection rating against dust and moisture: IP54 from underneath.  
High-purity matt anodised aluminium reflector.  
Powder painted aluminium frame available in assorted finishes, customized RAL under request.  
Frosted protection glass.  
Remote driver included.  
Electronic options for lighting control: DALI-2.  
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM  $\leq$  1 and SVM  $\leq$  0.4.  
3 hours battery available as option (class I).  
Passive temperature management: heat dissipation flows through an aluminium heat sink.  
Ceiling-mounted using galvanised steel support with screws, ceiling thickness up to 30mm.

**Luminaire luminous flux:** 1305lm  
**Luminaire connected power:** 17,1 W  
**Luminaire efficiency:** 76 lm/W  
**Light source luminous flux:** 2330lm  
**Light source power:** 15,43 W  
**Constant Current:** 500 mA  
**CRI:** >90 R9 64  
**Colour Temperature:** 3000K  
**Chromaticity Tolerance:** MacAdam 3  
**Beam Angle:** 82°  
**LOR:** 56%  
**LED reliability at nominal Ta = 25°C:** 100.000h L90B10  
**Photobiological safety group:** 1  
**This product contains a light source of energy efficiency class D**

**Electronic Equipment**  
**K:** On/Off (basic)  
**S:** On/Off (AC/DC + looping through)  
**SE:** On/Off (AC/DC+looping) + 3h battery  
**D:** DALI-2/switchDIM/corridorFUNCTION  
**DE:** DALI-2/switchDIM/corridorFUNCTION + Battery 3h  
**B:** Bluetooth-Casambi

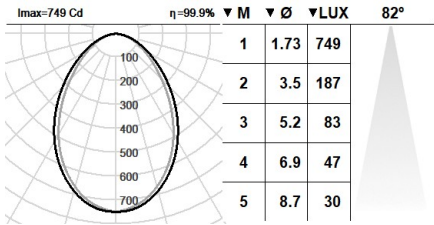

\*Add the suffix **-K, -S, -SE, -D, -DE, -B** after the reference to indicate your electronic equipment choice.

**Finishes**  
**1:** RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note