




101SPS.1.01-R2035



Recessed ceiling-mounted downlight with symmetrical light distribution to achieve an effective task, accent or ambient lighting.
Circular design in diameter 190mm.
Protection rating against dust and moisture: complete IP54.
Sandblasted metalized aluminium reflector.
Powder painted die-cast aluminium trim available in assorted finishes, customized RAL under request.
Luminaire supplied with complete C4 corrosion treatment (front and back).
Tempered protection glass clear as standard, other finishes under request.
Remote driver supplied.
Electronic options for lighting control: DALI-2 or Bluetooth.
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: $PstLM \leq 1$ and $SVM \leq 0,4$.
Luminaire designed according to ecodesign principles, with replaceable light source and driver, to enable upgrades, ease maintenance and extend the product lifecycle.
Passive temperature management: heat dissipation flows through aluminium heat sink.
Ceiling-mounted by three fixing points.

Luminaire luminous flux: 1346lm
Luminaire connected power: 11,9 W
Luminaire efficiency: 113 lm/W
Light source luminous flux: 1795lm
Light source power: 10,66 W
Constant Current: 350 mA
CRI: >90 R9 72
Colour Temperature: 4000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 77°
LOR: 75%
LED reliability at nominal Ta = 25°C: 60.000h L90B50 | 57.000h L90B10
UGR: $C0^\circ = 19,7$ | $C90^\circ = 19,6$ under the below indicated parameters
Room dimensions $X=4H/8H$
Reflectance 20% | 50% | 70%
Luminaire spacing = 0.25m
Photobiological safety group: 1
Cd/Klm: 591
This product contains a light source of energy efficiency class D

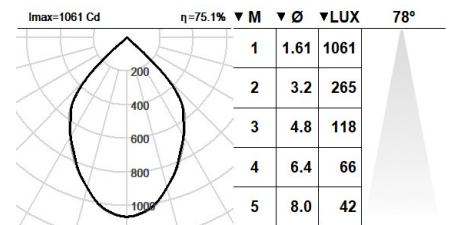

Electronic Equipment


K: On/Off (basic)
S: On/Off (AC/DC, NOT looping through capable)
D: DALI-2/switchDIM/corridorFUNCTION

*Add the suffix **-K**, **-S**, **-D** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 12.01.2026]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com