


	IP20	850°	+INSTAL 	+RAL 	 2.22Kg
---	------	------	--	---	---

Luminaire luminous flux: 530lm
Luminaire connected power: 5,15 W
Luminaire efficiency: 103 lm/W
Light source luminous flux: 855lm
Light source power: 4,64 W
Constant Current: 150 mA
CRI: >80
Colour Temperature: 2700K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 38°
LOR: 62%
LED reliability at nominal Ta = 25°C:
UGR: C0° = 17 | C90° = 23,2 under the b
Room dimensions X=4H/8H
Reflectance 20% | 50% | 70%
Luminaire spacing = 0.25m
Photobiological safety group: 1
Cd/Klm: 1077
This product contains a light source

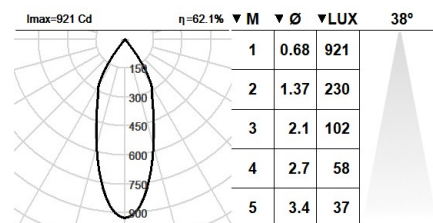

S: On/Off (AC/DC, NOT looping through capable)
D: DALI-2/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi

*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

1: RAL9010: Pure White textured, **2:** RAL9005: Jet Black textured, **4:** RAL7016: Anthracite Grey textured, **7:** RAL9006: White Aluminium textured

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 22.10.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - nºFM 39346
BSI Cert ISO 14001:2015 - nºEMS 554685

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 **www.rovasi.com**