




131VCT.8.01-I1479



Buried uplights with symmetrical light distribution.
 Linear fixture in 620mm length, width of 95mm and depth of 123mm.
 Protection rating against dust and moisture: complete IP67.
 Protection rating for resistance to harmful mechanical impacts: IK10.
 Robust and corrosion-resistant because of its black painted extruded aluminium profile with C5-M special coating for environments with very high corrosivity. Frame made of 316L stainless steel marine grade.
 Highly efficient linear printed circuit board.
 10 mm protection glass clear as standard.
 Interior optic to control the light.
 Built-in driver.
 Electronic options for lighting control: DALI-2 or Bluetooth.
 The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: $PstLM \leq 1$ and $SVM \leq 0,4$.
 Luminaire designed according to ecodesign principles, with replaceable light source and driver, to enable upgrades, ease maintenance and extend the product lifecycle.
 Floor installation with two fixing points.
 The electric cable inlet is on one end of the back of the light fixture. Under request, fixtures can also be supplied with two cable inlets, one on each side, for serial installation, reference F3.L1.VCT.
 The driver is on the inside of the fixture.
 Pre-wiring of 0.5 meters cable 3x1mm².
 IP68 connector to be ordered separately [reference F3.A3 (On/Off) / F3.A5 (DALI)].
 Installation box supplied with the lighting fixture.
 Passive temperature management.

Luminaire luminous flux: 3137lm
Luminaire connected power: 22,31 W
Luminaire efficiency: 141 lm/W
Light source luminous flux: 3690lm
Light source power: 20,08 W
Constant Current: 450 mA
CRI: >80
Colour Temperature: 4000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 43°
LOR: 85%
LED reliability at nominal Ta = 25°C: 100.000h L80B10
Photobiological safety group: 1
Cd/Klm: 815
This product contains a light source of energy efficiency class B

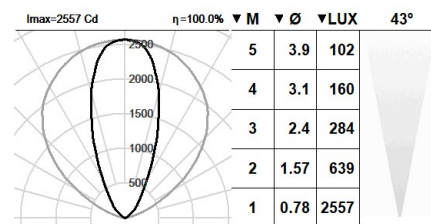

Electronic Equipment

S: On/Off (AC/DC, NOT looping through capable)
D: DALI-2/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi [10m]

*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

8: Stainless Steel 316L: Marine grade, **1:** RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 17.12.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
 BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarra
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com