


### 451RNA.1-I2459



Pendant linear fixtures with symmetrical light distribution to achieve an effective task or general lighting. Linear fixture in 569mm length and in a width of 55mm. Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request. Opal polycarbonate diffuser. Highly efficient linear printed circuit board. Built-in driver, included. Electronic options for lighting control: DALI-2 or Bluetooth. The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM  $\leq 1$  and SVM  $\leq 0,4$ . Luminaire designed according to ecodesign principles, with replaceable light source and driver, to enable upgrades, ease maintenance and extend the product lifecycle. Passive temperature management. Ceiling-mounted with adjustable steel wire suspension ( 1 m ) and transparent electrical wire. Different suspension length on request. End caps must be ordered separately, reference M5.E0055. Ceiling rose and electrical wire must be ordered separately, reference M5.GR3 [on/off] o M5.GR5 [DALI]. It is possible to combine different lengths to create customized design. The connection accessory must be ordered separately, reference M5.U.

**Luminaire luminous flux:** 771lm  
**Luminaire connected power:** 7,08 W  
**Luminaire efficiency:** 109 lm/W  
**Light source luminous flux:** 1285lm  
**Light source power:** 6,4 W  
**Constant Current:** 150 mA  
**CRI:** >80  
**Colour Temperature:** 5000K  
**Chromaticity Tolerance:** MacAdam 3  
**Beam Angle:** 103°  
**LOR:** 60%  
**LED reliability at nominal Ta = 25°C:** 100.000h L80B10  
**Photobiological safety group:** 0  
**This product contains a light source of energy efficiency class B**

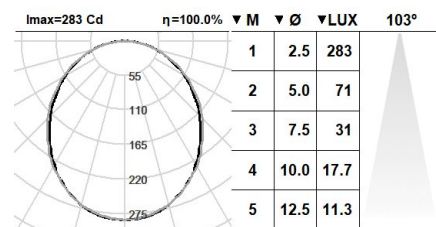

#### Electronic Equipment

**S:** On/Off (AC/DC, NOT looping through capable)  
**D:** DALI-2/switchDIM/corridorFUNCTION  
**B:** Bluetooth-Casambi

\*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

#### Finishes

**1:** RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

#### Upgradeable, Replaceable, Repairable



#### Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 16.12.2025]

#### 5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346  
 BSI Cert ISO 14001:2015 - n°EMS 554685

#### ROVASI S.L.

Ronda de la Font Grossa, 15  
 Pol. Ind. La Gavarra  
 08540 Centelles | Barcelona  
 Spain

#### Contact

T. +34 93 881 35 12 info@rovasi.com  
 T. +34 93 881 37 13 [www.rovasi.com](http://www.rovasi.com)