


	IP20	650°	+RAL 	 3.41Kg
---	------	------	---	---

It is possible to combine different lengths and junction modules in different ways to create customized design.

This product contains a light source of energy efficiency class B

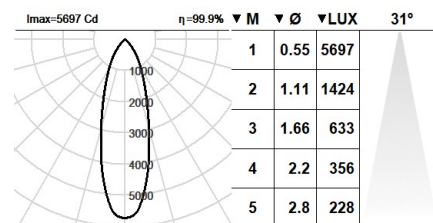

B: Bluetooth-Casambi

*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

The diagram is divided into two panels. The left panel shows 'Ambient lighting' with a person icon, a sun-like LED symbol, and a square LED panel, connected by double-headed arrows. The right panel shows 'Task lighting' with a person icon, a rectangular LED strip, and a circular LED spot, connected by double-headed arrows.

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 16.08.2025]

CE

BSI Cert ISO 14001:2015 - n°EMS 554685

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

T. +34 93 881 35 12
T. +34 93 881 37 13

info@rovasi.com
www.rovasi.com