



801GWL.1-I1714



Linear projectors with symmetrical light distribution to achieve an effective task or general lighting.
 Linear fixture in 581mm length and in a width of 70mm.
 Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
 Range of PMMA optics to achieve specific photometric results.
 Highly efficient linear printed circuit board.
 Built-in driver, included.
 Electronic options for lighting control: DALI-2 or Bluetooth.
 The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM \leq 1 and SVM \leq 0,4.
 Luminaire designed according to ecodesign principles, with replaceable light source and driver, to enable upgrades, ease maintenance and extend the product lifecycle.
 Passive temperature management.
 Ceiling or wall mounted using adjustable supports.
 Matching products:
 GOWEL 100 recessed with frame.
 GOWEL 200 frameless recessed.
 GOWEL 300 surface mounted.
 GOWEL 400 pendant.

Luminaire luminous flux: 3176lm
Luminaire connected power: 21,2 W
Luminaire efficiency: 150 lm/W
Light source luminous flux: 3490lm
Light source power: 18,2 W
Constant Current: 300 mA
CRI: 80
Colour Temperature: 5000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 17°
LOR: 91%
LED reliability at nominal Ta = 25°C: 72.000h L80B10
UGR: C0° = 19,1 | C90° = 19,1 under the below indicated parameters
 Room dimensions X=4H/8H
 Reflectance 20% | 50% | 70%
 Luminaire spacing = 0.25m
Photobiological safety group: 1
Cd/Klm: 6350
This product contains a light source of energy efficiency class C

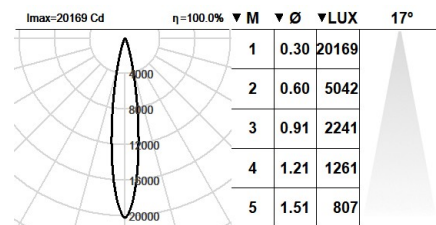

Electronic Equipment

S: On/Off (AC/DC, NOT looping through capable)
D: DALI-2/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi

*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 13.12.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
 BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarra
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com