


	IP20	IK06	650°	+RAL 	 2.88Kg
---	------	------	------	---	---

Luminaire luminous flux: 5187lm
Luminaire connected power: 35,5 W
Luminaire efficiency: 146 lm/W
Light source luminous flux: 5700lm
Light source power: 32 W
Constant Current: 500 mA
CRI: 80
Colour Temperature: 4000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 17°
LOR: 91%
LED reliability at nominal Ta = 25°C:
UGR: C0° = 20,8 | C90° = 20,8 under the
Room dimensions X=4H/8H
Reflectance 20% | 50% | 70%
Luminaire spacing = 0.25m
Photobiological safety group: 1
Cd/Klm: 6350
This product contains a light source

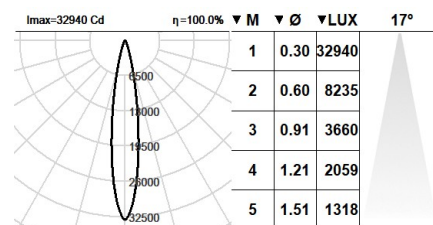

S: On/Off (AC/DC, NOT looping through capable)
D: DALI-2/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi

*Add the suffix **-S, -D, -B** after the reference to indicate your electronic equipment choice.

1: RAL9010: Pure White. **2:** RAL9005: Jet Black. **4:** RAL7016: Anthracite Grey. **7:** RAL9006: White Aluminium

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 22.01.2026]

CE

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 **www.rovasi.com**