

MOVE 100

Spots with recessed base

ROVASI
Positive Lighting



107MOV.1-R2077



Recessed spots with symmetrical light distribution to achieve an effective task, accent or general lighting. Cylindrical design in diameter 120mm.

Articulated arm adjustable 0°, 15°, 30°, 45°, 60°, 75° and 90° and with 355° rotation around the vertical axis.

Facetted metalized or sandblasted metalized aluminium reflector.

Powder painted aluminium body and arm available in assorted finishes, customized RAL under request.

Die-cast aluminium recessed base supplied with the same finish as the light fixture.

Optional anti-glare accessories for more visual comfort.

Remote driver included.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0,4.

Luminaire designed according to ecodesign principles, with replaceable light source and driver, to enable upgrades, ease maintenance and extend the product lifecycle.

Passive temperature management: heat dissipation flows through aluminium heat sink.

Mounted to the ceiling by two fixing points.

Luminaire luminous flux: 2307lm

Luminaire connected power: 17,1 W

Luminaire efficiency: 135 lm/W

Light source luminous flux: 2535lm

Light source power: 15,43 W

Constant Current: 500 mA

CRI: >90 R9 72

Colour Temperature: 4000K

Chromaticity Tolerance: MacAdam 3

Beam Angle: 12°

LOR: 91%

LED reliability at nominal Ta = 25°C: 57000h L90B10 >60000h L90B50

UGR: C0° = 14,8 | C90° = 14,8 under the below indicated parameters

Room dimensions X=4H/8H

Reflectance 20% | 50% | 70%

Luminaire spacing = 0.25m

Photobiological safety group: 1

This product contains a light source of energy efficiency class D

Electronic Equipment

K: On/Off (basic)

S: On/Off (AC/DC, NOT looping through capable)

SE: On/Off (AC/DC) + Battery 3h

D: DALI-2/switchDIM/corridorFUNCTION


DE: DALI-2/switchDIM + 3h battery

B: Bluetooth-Casambi

*Add the suffix **-K**, **-S**, **-SE**, **-D**, **-DE**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

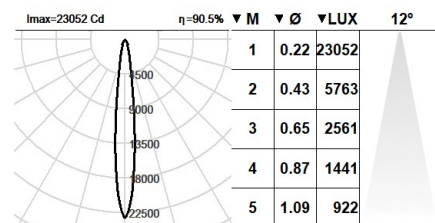

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 10.01.2026]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarrà
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com