



101HDN.1-R2317



Recessed ceiling-mounted multiDirectional downlights with symmetrical light distribution to achieve an effective task, accent or general lighting.  
Square design in 110mm x 110mm.  
Swivel mounted downlights, adjustable up to 25° and with 180° rotation.  
Die-cast aluminium trim and recessing surface powder painted in assorted finishes, customized RAL under request.  
Honeycomb anti-dazzle screen accessory to increase visual comfort [reference M6.A0050].  
Electronic options for lighting control: DALI-2 or Bluetooth.  
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4.  
3 hours battery available as option.  
Passive temperature management: heat dissipation flows through an aluminium heat sink.  
Ceiling-mounted with spring clamps for easy installation.

**Luminaire luminous flux:** 860lm  
**Luminaire connected power:** 7,25 W  
**Luminaire efficiency:** 119 lm/W  
**Light source luminous flux:** 860lm  
**Light source power:** 6,5 W  
**Constant Current:** 200 mA  
**CRI:** >90 R9 75  
**Colour Temperature:** 4000K  
**Chromaticity Tolerance:** MacAdam 3  
**Beam Angle:** 36°  
**LOR:** 100%  
**LED reliability at nominal Ta = 25°C:** 54.000h L90B10  
**Photobiological safety group:** 0  
**Cd/Klm:** 2030  
**This product contains a light source of energy efficiency class F**


**Electronic Equipment**  
**K:** On/Off (basic)  
**S:** On/Off (AC/DC, NOT looping through capable)  
**SE:** On/Off (AC/DC) + Battery 3h  
**D:** DALI-2/switchDIM/corridorFUNCTION  
**DE:** DALI-2/switchDIM + 3h battery  
**B:** Bluetooth-Casambi

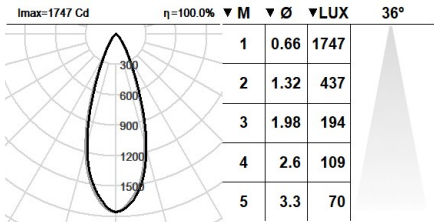

\*Add the suffix **-K, -S, -SE, -D, -DE, -B** after the reference to indicate your electronic equipment choice.

**Finishes**  
**1:** RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note