





150KBR.11-I2900



Recessed ceiling mounted linear downlights with symmetrical light distribution to achieve an effective task or general lighting.
 Linear fixture in 310mm length and in a width of 70mm.
 Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
 White finish darklight reflector in 7 cells designed to ensure visual comfort.
 Blind covers available with a length of 280mm or its multiples: accessory reference M5.Y.
 Highly efficient linear printed circuit board.
 Built-in driver, included.
 Electronic options for lighting control: DALI-2 or Bluetooth.
 The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: $PstLM \leq 1$ and $SVM \leq 0.4$.
 Passive temperature management.
 Ceiling-mounted using steel support with screws. It is possible to combine different lengths and junction modules in different ways to create customized design.

Luminaire luminous flux: 431lm
Luminaire connected power: 3,97 W
Luminaire efficiency: 109 lm/W
Light source luminous flux: 440lm
Light source power: 2,8 W
Constant Current: 150 mA
CRI: 90
Colour Temperature: 2700K
Chromaticity Tolerance: MacAdam3
Beam Angle: 78°
LOR: 98%
LED reliability at nominal Ta = 25°C: 90.000h L80B10
UGR: $C0^\circ = 15,9$ | $C90^\circ = 15,8$ under the below indicated parameters
 Room dimensions $X=4H/8H$
 Reflectance 20% | 50% | 70%
 Luminaire spacing = 0.25m
Photobiological safety group: 1
This product contains a light source of energy efficiency class D

Electronic Equipment
S: On/Off
D: DALI-2/switchDIM
B: Bluetooth-Casambi

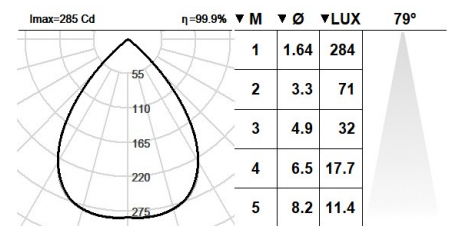

Photobiological safety group: 1

This product contains a light source of energy efficiency class D

Electronic Equipment

S: On/Off
D: DALI-2/switchDIM
B: Bluetooth-Casambi

*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

11: White frame - white reflector

Upgradeable, Replaceable, Repairable**Note**

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 17.11.2025]

5 years guarantee

BSI Cert ISO 9001:2015 - n°FM 39346
 BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarra
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com