

108CND.1.02-I638



Recessed ceiling mounted downlights with symmetrical light distribution to achieve an effective ambient lighting.

Flush installation, the fixture is completely fitted in the ceiling void. Installation in plasterboard ceilings.

Circular design available in 356mm diameter.

Powder painted one piece aluminium profile available in assorted finishes, customized RAL under request.

PMMA opal diffuser (thickness 3mm.).

Tridonic high energy efficiency printed circuit board.

Built-in driver, included.

Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4.

Passive temperature management: heat dissipation flows through the fixture body itself.

Ceiling-mounted using galvanised steel support with screws, ceiling thickness up to 30mm.

CANDRA can be combined with PLACE pendant downlights and LEDA surface-mounted downlights to get a harmonious finish.

Luminaire luminous flux: 2507lm
Luminaire connected power: 18.14 W
Luminaire efficiency: 138 lm/W
Light source luminous flux: 2870lm
Light source power: 17 W
Constant Current: 600 mA
CRI: >80
Colour Temperature: 4000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 114°
LOR: 87%
Average Service Life: 50000h
LED reliability: >50000 L90B10
UGR: <19 under the below indicated parameters
 Room dimensions X=4H/8H
 Reflectance 20% | 50% | 70%
 Luminaire spacing = 0.45m

Photobiological safety group: 1

Cd/Klm: 345

Imax: 863 Cd

This product contains a light source of energy efficiency class C

Electronic Equipment

S: On/Off (AC/DC)


D: DALI-2/switchDIM/corridorFUNCTION

B: Bluetooth-Casambi

*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

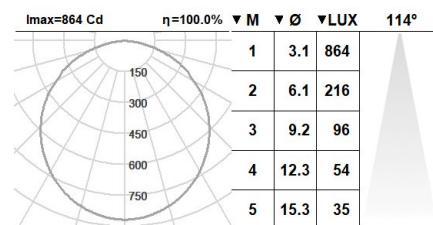

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 30.04.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarra
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com