

486GWL.1-I952



Pendant linear downlights with asymmetrical light distribution to achieve an effective task or accent lighting.

Linear fixture in 1441mm length and in a width of 70mm.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request. PMMA optic to achieve specific photometric results.

Accessories available to create customized linear systems.

Highly efficient linear printed circuit board.

Built-in driver, included.

Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4.


3 hours battery available as option.

Passive temperature management.

Ceiling-mounted with adjustable steel wire suspension (1m) and transparent electrical wire. Different suspension length on request.

It is possible to combine different lengths and junction modules in different ways to create customized systems.

Luminaire luminous flux: 3498lm
Luminaire connected power: 27.05 W
Luminaire efficiency: 129 lm/W
Light source luminous flux: 3975lm
Light source power: 23 W
Constant Current: 150 mA
CRI: 80
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: ASY°
LOR: 88%
Average Service Life: 50000h
LED reliability: >54000h L80B10
Photobiological safety group: 1
Cd/Klm: 2131
Imax: 8471 Cd
This product contains a light source of energy efficiency class D

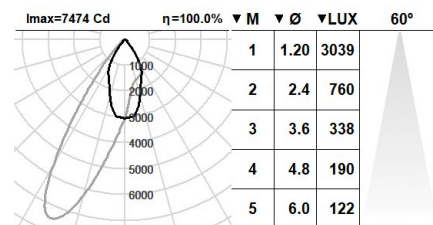

Electronic Equipment

S: On/Off (AC/DC)

SE: On/Off (AC/DC) + Battery 3h

D: DALI-2/switchDIM/corridorFUNCTION

DE: DALI-2/switchDIM+ 3 hours battery

DDE: DALI-2/switchDIM+ 3 hours battery (DALI)

B: Bluetooth-Casambi

*Add the suffix **-S, -SE, -D, -DE, -DDE, -B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 10.05.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarrà
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com