


499GWL.1-I961



Pendant linear downlights with asymmetrical light distribution to achieve an effective task or accent lighting.
Linear fixture in 2875mm length and in a width of 70mm.
Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
PMMA optic to achieve specific photometric results.
Accessories available to create customized linear systems.
Highly efficient linear printed circuit board.
Built-in driver included
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4 .
Electronic options for lighting control: DALI-2 (two DALI addresses).
3 hours battery available as option.
Passive temperature management.
Ceiling-mounted with adjustable steel wire suspension (1m) and transparent electrical wire. Different suspension length on request.
It is possible to combine different lengths and junction modules in different ways to create customized systems.

Luminaire luminous flux: 7712lm
Luminaire connected power: 54.01 W
Luminaire efficiency: 143 lm/W
Light source luminous flux: 7950lm
Light source power: 46 W
Constant Current: 150 mA
CRI: 80
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: DASY°
LOR: 97%
Average Service Life: 50000h
LED reliability: >54000h L80B10
Photobiological safety group: 1
Cd/Klm: 1547
Imax: 12299 Cd
This product contains a light source of energy efficiency class D

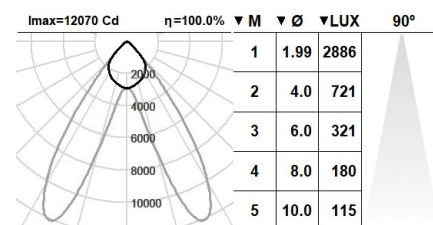

Electronic Equipment



S: On/Off (AC/DC)
SE: On/Off (AC/DC) + Battery 3h
D: DALI-2/switchDIM/corridorFUNCTION
DE: DALI-2/switchDIM+ 3 hours battery
DDE: DALI-2/switchDIM+ 3 hours battery (DALI)
B: Bluetooth-Casambi

*Add the suffix **-S, -SE, -D, -DE, -DDE, -B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 09.05.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com