




851TRT.1-I744



Linear projectors or uplights with symmetrical light distribution to achieve an effective task or general lighting.
 Linear fixture in 566mm length and in a width of 40mm.
 Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
 Opal extruded polycarbonate diffuser.
 Highly efficient linear printed circuit board.
 Built-in driver, included.
 Electronic options for lighting control: DALI-2.
 The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4 .
 Passive temperature management.
 Wall mounted by adjustable mounting brackets.
 Matching products:
 TIRET 100 recessed.
 TIRET 200 frameless recessed.
 TIRET 300 surface mounted.
 TIRET 400 and TIRET 500 pendant.
 TIRET 600 and TIRET 700 wall-mounted.
 TIRET 800 projectors.

Luminaire luminous flux: 2073lm
Luminaire connected power: 22.48 W
Luminaire efficiency: 92 lm/W
Light source luminous flux: 3290lm
Light source power: 20 W
Constant Current: 450 mA
CRI: 80
Colour Temperature: 2700K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 91°
LOR: 63%
Average Service Life: 50000h
LED reliability: >70000h L80B10
UGR: 19 under the below indicated parameters
 Room dimensions X=4H/8H
 Reflectance 20% | 50% | 70%
 Luminaire spacing = 0.75m
Photobiological safety group: 1
Cd/Klm: 443
Imax: 1457 Cd
This product contains a light source of energy efficiency class D

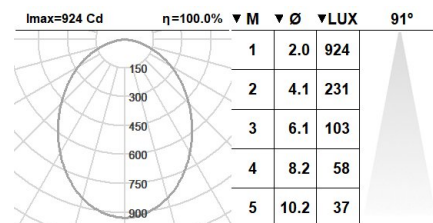

Electronic Equipment

S: On/Off (AC/DC)
D: DALI-2/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi

*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 30.04.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
 BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarra
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com