


## 111MOV.1-R1141



Recessed spots with symmetrical light distribution to achieve an effective task, accent or general lighting. Special LED module created to be the optimal solution for specific projects.

Cylindrical design in diameter 140 mm.

Articulated arm adjustable 0°, 15°, 30°, 45°, 60°, 75° and 90° and with 355° rotation around the vertical axis.

Facetted metalized or sandblasted metalized aluminium reflector.

Powder painted aluminium body and arm available in assorted finishes, customized RAL under request.

Die-cast aluminium recessed base supplied with the same finish as the light fixture.

Optional anti-glare accessories for more visual comfort.

Remote driver included.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0,4.

Luminaire designed according to ecodesign principles, with replaceable light source and driver, to enable upgrades, ease maintenance and extend the product lifecycle.

Passive temperature management: heat dissipation flows through aluminium heat sink.

Mounted to the ceiling by two fixing points.

**Luminaire luminous flux:** 2498lm  
**Luminaire connected power:** 33.05 W  
**Luminaire efficiency:** 76 lm/W  
**Light source luminous flux:** 2745lm  
**Light source power:** 30 W  
**Constant Current:** 900 mA  
**CRI:** >90  
**Colour Temperature:** GOLD+  
**Chromaticity Tolerance:** MacAdam 4  
**Beam Angle:** 12°  
**LOR:** 91%

**LED reliability at nominal Ta = 25°C:** 50000h L90B50

**UGR:** C0° = 15,3 | C90° = 15,3 under the below indicated parameters

Room dimensions X=4H/8H

Reflectance 20% | 50% | 70%

Luminaire spacing = 0.25m

**Photobiological safety group:** 1

**This product contains a light source of energy efficiency class F**

### Electronic Equipment

**K:** On/Off (basic)

**S:** On/Off (AC/DC, NOT looping through capable)

**SE:** On/Off (AC/DC) + Battery 3h

**D:** DALI-2/switchDIM/corridorFUNCTION


**DE:** DALI-2/switchDIM + 3h battery

**B:** Bluetooth-Casambi


\*Add the suffix **-K, -S, -SE, -D, -DE, -B** after the reference to indicate your electronic equipment choice.

### Finishes

**1:** RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

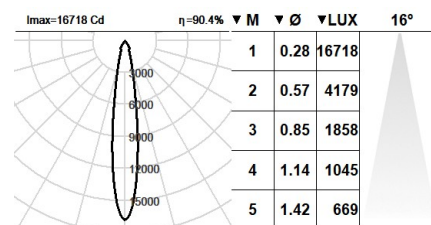

### Upgradeable, Replaceable, Repairable

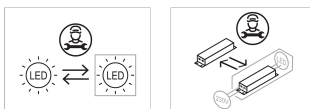

### Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 18.12.2025]

### 5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

### ROVASI S.L.

Ronda de la Font Grossa, 15  
 Pol. Ind. La Gavarra  
 08540 Centelles | Barcelona  
 Spain

### Contact

T. +34 93 881 35 12 info@rovasi.com  
 T. +34 93 881 37 13 [www.rovasi.com](http://www.rovasi.com)