# MOVE 300
Surface-mounted spots

ROVASI
Positive Lighting




## 307MOV.1-I1150

IP20 | 850º | +DECO | +RAL

Surface-mounted spots with symmetrical light distribution to achieve an effective task, accent or general lighting.
Special LED module created to be the optimal solution for specific projects.
Cylindrical design in diameter 120mm.
Articulated arm adjustable 0º,15º, 30º, 45º, 60º, 75º and 90º and with 355º rotation around the vertical axis.
Facetted metalized or sandblasted metalized aluminium reflector.
Powder painted aluminium body and arm available in assorted finishes, customized RAL under request.
Aluminium base for attachment to the ceiling supplied with the same finish as the light fixture.
Optional anti-glare accessories for more visual comfort.
Integral driver included.
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4.
Passive temperature management: heat dissipation flows through aluminium heat sink.
Mounted to the ceiling by two fixing points.

**Luminaire luminous flux:** 969lm
**Luminaire connected power:** 12,61 W
**Luminaire efficiency:** 77 lm/W
**Light source luminous flux:** 1065lm
**Light source power:** 11 W
**Constant Current:** 350 mA
**CRI:** >90
**Colour Temperature:** MEAT+
**Chromaticity Tolerance:** MacAdam 3
**Beam Angle:** 12º
**LOR:** 91%
**LED reliability at nominal Ta = 25ºC:** 50000h L90B50
**UGR:** C0º = 11,8 | C90º = 11,8 under the below indicated parameters
Room dimensions X=4H/8H
Reflectance 20% | 50% | 70%
Luminaire spacing = 0.25m
**Photobiological safety group:** 1

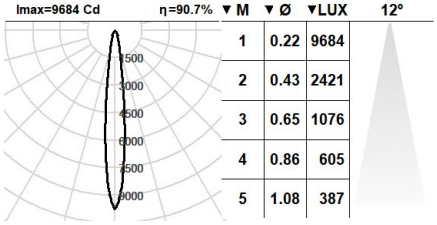


| ▼M | ▼Ø | ▼LUX | 12º |
|---|---|---|---|
| 1 | 0.22 | 9684 | |
| 2 | 0.43 | 2421 | |
| 3 | 0.65 | 1076 | |
| 4 | 0.86 | 605 | |
| 5 | 1.08 | 387 | |

**Electronic Equipment**
**K:** On/Off (basic)
**S:** On/Off (AC/DC, NOT looping through capable)
**D:** DALI-2/switchDIM/corridorFUNCTION

*Add the suffix **-K, -S, -D** after the reference to indicate your electronic equipment choice.

**Finishes**
**1:** RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

**Upgradeable, Replaceable, Repairable**






Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 01.10.2025]

**5 years guarantee**

CE

BSI Cert ISO 9001:2015 - nºFM 39346
BSI Cert ISO 14001:2015 - nºEMS 554685

**ROVASI S.L.**
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

**Contact**
T. +34 93 881 35 12
T. +34 93 881 37 13
info@rovasi.com
**www.rovasi.com**