MOVE 900
Track spots

ROVASI
Positive Lighting



907MOV.1-T1149

IP20 | 850º | +RAL

Track spots with symmetrical light distribution to achieve an effective task, accent or general lighting.
Special LED module created to be the optimal solution for specific projects.
Cylindrical design in diameter 120mm.
Articulated arm adjustable 0º,15º, 30º, 45º, 60º, 75º and 90º and with 355º rotation around the vertical axis.
Facetted metalized or sandblasted metalized aluminium reflector.
Powder painted aluminium body and arm available in assorted finishes, customized RAL under request.
Track adaptor available in white, black or grey.
Optional anti-glare accessories for more visual comfort.
Driver built into the track adaptor. Consult compatible tracks with the track adaptor.
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤0,4.
Luminaire designed according to ecodesign principles, with replaceable light source and driver, to enable upgrades, ease maintenance and extend the product lifecycle.
Passive temperature management: heat dissipation flows through aluminium heat sink.
Three-phase tracks are available as well as accessories to create a custom system.

Luminaire luminous flux: 965lm
Luminaire connected power: 12.61 W
Luminaire efficiency: 77 lm/W
Light source luminous flux: 1060lm
Light source power: 11 W
Constant Current: 350 mA
CRI: >90
Colour Temperature: FRESH MEAT
Chromaticity Tolerance: MacAdam 4
Beam Angle: 12º
LOR: 91%
LED reliability at nominal Ta = 25ºC: 50000h L90B50
Photobiological safety group: 1

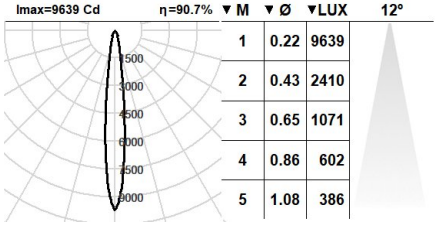

▼M	▼Ø	▼LUX	12º
1	0.22	9639	
2	0.43	2410	
3	0.65	1071	
4	0.86	602	
5	1.08	386	

Electronic Equipment
S: On/Off
D: DALI-2/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi

*Add the suffix **-S, -D, -B** after the reference to indicate your electronic equipment choice.

Finishes
1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable





Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 02.01.2026]

5 years guarantee

CE

BSI Cert ISO 9001:2015 - nºFM 39346
BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact
T. +34 93 881 35 12
T. +34 93 881 37 13
info@rovasi.com
www.rovasi.com