
KAUTTA 100 IP40 Recessed linear downlights





181KTA.1-I677

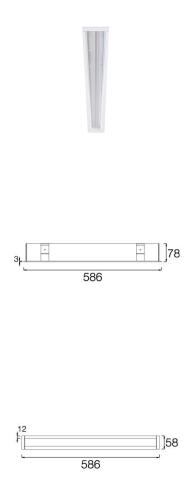

Recessed linear downlights with asymmetrical light distribution to achieve an effective task or general lighting.

Linear fixture in 574mm length and in a width of 47mm.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request. PMMA optics for controlling and directing the light.

Highly efficient linear printed circuit board.

Accessories available to create customized linear systems.

Built-in driver, included. Tunable White: 2700K - 6500K.

Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM \leq 1 and SVM \leq 0.4.

3 hours battery available as option.

Passive temperature management.

Ceiling-mounted using galvanized steel support with screws.

It is possible to combine different lengths and junction modules in different ways to create customized systems.

Luminaire connected power: 27,7 W Light source luminous flux: 3000lm Light source power: 27,7 W **CRI:** >90 Colour Temperature: 2700K - 6500K Beam Angle: ASYº Average Service Life: 50000h Photobiological safety group: 1 This product contains a light source of energy effic

Electronic Equipment

T: Tunable White DALI-2/switchDIM/ColourSwitch

*Add the suffix -T after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, 2: RAL9005: Jet Black, 4: RAL7016: Anthracite Grey, 7: RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 11.05.2025]

5 years guarantee

BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.

Pol. Ind. La Gavarra

Spain

Ronda de la Font Grossa, 15

08540 Centelles | Barcelona

Contact

T. +34 93 881 35 12 T. +34 93 881 37 13 info@rovasi.com www.rovasi.com