


101NCL.1-R2321



Recessed ceiling-mounted downlight with symmetrical light distribution to achieve an effective task, accent or ambient lighting.  
Circular design in diameter 110mm.  
Sandblasted metalized aluminium reflector.  
Powder painted die-cast aluminium trim available in assorted finishes, customized RAL under request.  
Accessory available to increase the protection rating to IP44 from underneath [reference M2.J0110].  
Honeycomb anti-dazzle screen accessory to increase visual comfort [reference M6.A0050].  
Remote driver included.  
Electronic options for lighting control: DALI-2.  
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4.  
3 hours battery available as option.  
Passive temperature management: heat dissipation flows through an aluminium heat sink.  
Ceiling-mounted by spring clamps for easy installation, ceiling thickness up to 25mm.

**Luminaire luminous flux:** 817lm  
**Luminaire connected power:** 9,14 W  
**Luminaire efficiency:** 89 lm/W  
**Light source luminous flux:** 950lm  
**Light source power:** 8,2 W  
**Constant Current:** 250 mA  
**CRI:** >90 R9 52  
**Colour Temperature:** 2700K  
**Chromaticity Tolerance:** MacAdam 3  
**Beam Angle:** 21°  
**LOR:** 86%  
**LED reliability at nominal Ta = 25°C:** 54.000h L90B10  
**Photobiological safety group:** 0  
**This product contains a light source of energy efficiency class F**

**Electronic Equipment**  
**K:** On/Off (basic)  
**S:** On/Off (AC/DC, NOT looping through capable)  
**SE:** On/Off (AC/DC) + Battery 3h  
**D:** DALI-2/switchDIM/corridorFUNCTION  
**DE:** DALI-2/switchDIM + 3h battery  
**B:** Bluetooth-Casambi

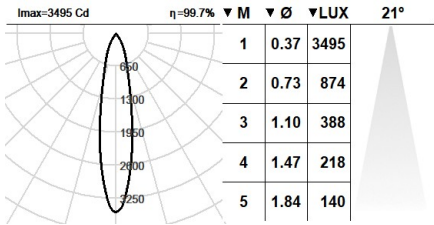

\*Add the suffix **-K, -S, -SE, -D, -DE, -B** after the reference to indicate your electronic equipment choice.

**Finishes**  
**1:** RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note