


	IP65	IK07	850°	+ INSTAL 	+RAL 	 2.5Kg
--	------	------	------	--------------	----------	-----------

Luminaire luminous flux: 1193lm
Luminaire connected power: 10,2 W
Luminaire efficiency: 117 lm/W
Light source luminous flux: 1755lm
Light source power: 9,1 W
Constant Current: 300 mA
CRI: >80
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 19°
LOR: 68%
LED reliability at nominal Ta = 25°C: 100.000h L90B50 | 50.000h L90B10
Photobiological safety group: 1
This product contains a light source of energy efficiency class C

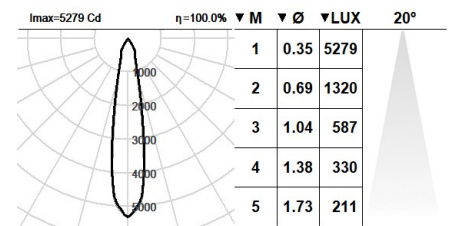

S: On/Off (AC/DC)
D: DALI-2/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi [15m]

Finishes

1: RAL9010: Pure White textured, 2: RAL9005: Jet Black textured, 4: RAL7016: Anthracite Grey textured, 7: RAL9006: White Aluminium textured, 80 Corten, 90: RAL6005 Moss Green textured

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 07.07.2025]

CE

ROVASI S.L.

Contact

T. +34 93 881 35 12
T. +34 93 881 37 13

info@rovasi.com
www.rovasi.com