



101TRG.1-R2010



Recessed ceiling-mounted downlights with symmetrical light distribution to achieve an effective task or general lighting.
Triangular design in 216mm side.
Protection rating against dust and moisture: IP54 from underneath.
High-purity matt anodised aluminium reflector.
Powder painted aluminium frame available in assorted finishes, customized RAL under request.
Frosted protection glass.
Remote driver included.
Electronic options for lighting control: DALI-2.
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4 .
3 hours battery available as option (class I).
Passive temperature management: heat dissipation flows through an aluminium heat sink.
Ceiling-mounted using galvanised steel support with screws, ceiling thickness up to 30mm.

Luminaire luminous flux: 1305lm
Luminaire connected power: 17,1 W
Luminaire efficiency: 76 lm/W
Light source luminous flux: 2330lm
Light source power: 15,43 W
Constant Current: 500 mA
CRI: >90 R9 64
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 82°
LOR: 56%
LED reliability at nominal Ta = 25°C: 100.000h L90B10
Photobiological safety group: 1
This product contains a light source of energy efficiency class D

Electronic Equipment
K: On/Off (basic)
S: On/Off (AC/DC + looping through)
SE: On/Off (AC/DC+looping) + 3h battery
D: DALI-2/switchDIM/corridorFUNCTION
DE: DALI-2/switchDIM/corridorFUNCTION + Battery 3h
B: Bluetooth-Casambi

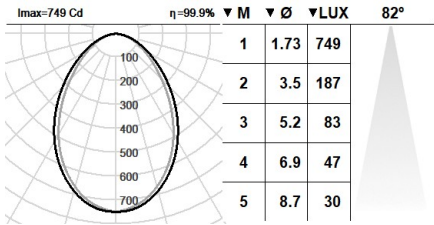

*Add the suffix **-K, -S, -SE, -D, -DE, -B** after the reference to indicate your electronic equipment choice.

Finishes
1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note