


250RNA.1-I2436



Wall or ceiling mounted recessed linear fixtures with symmetrical light distribution to achieve an effective task or general lighting.

Frameless linear fixture in 290mm length and in a width of 55mm.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request. Opal polycarbonate diffuser.

Highly efficient linear printed circuit board.

Built-in driver, included.

Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤ 0.4.

Passive temperature management.

Ceiling-mounted using steel support with screws.

End caps must be ordered separately, reference M5.E0055.

It is possible to combine different lengths to create customized design. The connection accessory must be ordered separately, reference M5.P0055.

Leuchten Lichtstrom: 600lm

Leuchten Anschlussleistung: 7,9 W

Leuchten Lichtausbeute: 76 lm/W

Lichtquelle Lichtstrom: 1000lm

Lichtquelle-Anschlussleistung: 5,41 W

Konstantstromquelle: 250 mA

Farbwiedergabeindex: >80

Ähnlichste Farbtemperatu: 3000K

Farborttoleranz: MacAdam 3


Winkel: 103°

LOR: 60%

Bemessene Lebensdauer der LEDs bei Ta = 25°C: 100.000h L80B10

Photobiologische Sicherheit Gruppe: 0

Dieses Produkt enthält eine Lichtquelle der Energieeffizienzklasse C

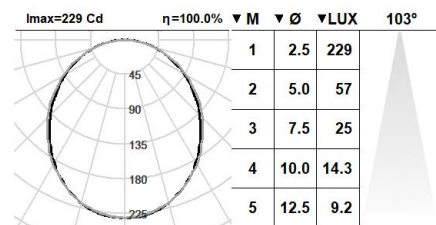

Elektronische Ausrüstung

S: On/Off

D: DALI-2/switchDIM



B: Bluetooth-Casambi

*Ein beliebiges vorgenanntes Suffix **-S**, **-D**, **-B** zur Referenz hinzufügen, um die gewünschte elektronische Ausrüstung anzugeben.

Finishes

1: RAL9010: Reinweiß, **2:** RAL9005: Tiefschwarz, **4:** RAL7016: Anthrazitgrau, **7:** RAL9006: Weißaluminium

Aufrüstbar, austauschbar, reparierbar



Anmerkung

Die LED-Technologie und Leistungsdaten sind einem ständigen Wandel unterworfen. Aktuelle Details müssen daher bei ROVASI nachgefragt werden, um sicherzustellen, dass die Daten aktuell sind. Aktualisierte Daten werden auf Anfrage bereitgestellt. [Letzte Revision 21.05.2025].

5 Jahre Garantie



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spanien

Kontakt

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com