
HORIZON 700



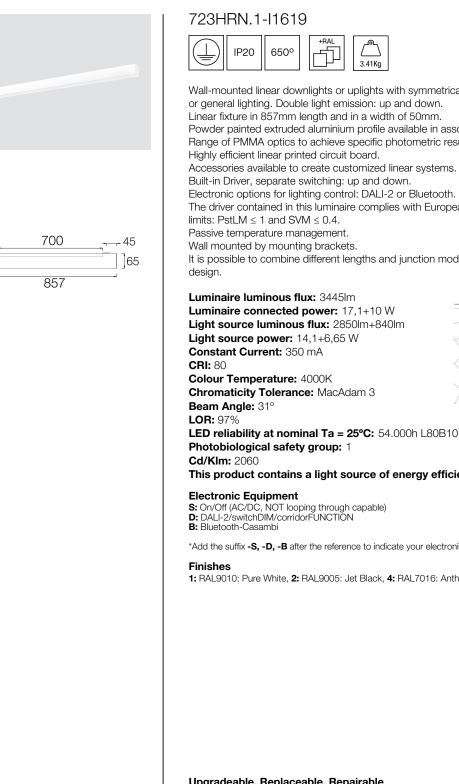

Wall-mounted linear downlights or uplights with symmetrical light distribution to achieve an effective task or general lighting. Double light emission: up and down.

Linear fixture in 857mm length and in a width of 50mm.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request. Range of PMMA optics to achieve specific photometric results.


Accessories available to create customized linear systems.

Electronic options for lighting control: DALI-2 or Bluetooth.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker

It is possible to combine different lengths and junction modules in different ways to create customized

Light source luminous flux: 2850lm+840lm



This product contains a light source of energy efficiency class B

*Add the suffix -S, -D, -B after the reference to indicate your electronic equipment choice.

1: RAL9010: Pure White, 2: RAL9005: Jet Black, 4: RAL7016: Anthracite Grey, 7: RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 07.09.2025]

5 years guarantee

BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.

Pol. Ind. La Gavarra

Spain

08540 Centelles | Barcelona

Ronda de la Font Grossa, 15

Contact

T. +34 93 881 35 12 T. +34 93 881 37 13 info@rovasi.com www.rovasi.com