KAUTTA 100

IP40 Recessed linear downlights

ROVASI
Positive Lighting





130KTA.1-I1443



Wall or ceiling mounted recessed linear fixture with symmetrical light distribution to achieve an effective accent, task or general lighting.
Linear fixture in 303mm length and in a width of 58mm.
Powder painted extruded aluminium profile available in assorted finishes, customized RAL upon request.
PMMA optics for controlling and directing the light.
Highly efficient linear printed circuit board.
Accessories available to create customized linear systems.
Built-in driver, included. Electronic options for lighting control: DALI-2 or Bluetooth.
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤0,4.
Luminaire designed according to ecodesign principles, with replaceable light source and driver, to enable upgrades, ease maintenance and extend the product lifecycle.
Passive temperature management.
Ceiling-mounted using steel support with screws.
Pre-wiring of 35cm cable 3x1mm2.
It is possible to combine different lengths and junction modules in different ways to create customized systems.

Luminaire luminous flux: 1283lm
Luminaire connected power: 10,2 W
Luminaire efficiency: 126 lm/W
Light source luminous flux: 1380lm
Light source power: 7,7 W
Constant Current: 350 mA
CRI: >80
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 41º
LOR: 93%
LED reliability at nominal Ta = 25ºC: 100.000h L80B10
UGR: C0º = 22,1 | C90º = 27,7
under the below indicated parameters
Room dimensions X=4H/8H
Reflectance 20% | 50% | 70%
Luminaire spacing = 0.25m
Photobiological safety group: 1
Cd/Klm: 704
This product contains a light source of energy efficiency class C

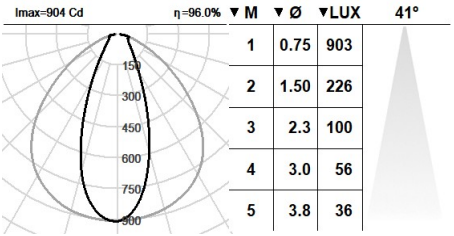

▼M	▼Ø	▼LUX	41°
1	0.75	903	
2	1.50	226	
3	2.3	100	
4	3.0	56	
5	3.8	36	

Electronic Equipment
S: On/Off
D: DALI-2/switchDIM/corridorFUNCTION
*Add the suffix **-S, -D** after the reference to indicate your electronic equipment choice.

Finishes
1: RAL9010: Pure White,
2: RAL9005: Jet Black,
4: RAL7016: Anthracite Grey,
7: RAL9006: Light Metallic Grey
The full range of RAL Classic colours (216 colours) is available upon request.

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 09.11.2026]

5 years guarantee

CE

BSI Cert ISO 9001:2015 - nºFM 39346
BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact
T. +34 93 881 35 12
T. +34 93 881 37 13
info@rovasi.com
www.rovasi.com