




939KTA.1-I1570



Linear downlights with three-phase track adapter. Symmetrical light distribution to achieve an effective accent, task or general lighting.
 Linear fixture in 2808mm length and in a width of 44mm.
 Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request.
 PMMA optics for controlling and directing the light.
 Highly efficient linear printed circuit board.
 Built-in driver included
 The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM \leq 1 and SVM \leq 0.4.
 Electronic options for lighting control: DALI-2 (two DALI addresses) .
 3 hours battery available as option.
 Passive temperature management.
 Three-phase tracks are available as well as accessories to create a custom system.

Luminaire luminous flux: 6017lm
Luminaire connected power: 35,42 W
Luminaire efficiency: 170 lm/W
Light source luminous flux: 6470lm
Light source power: 32 W
Constant Current: 150 mA
CRI: >80
Colour Temperature: 4000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 43°
LOR: 93%
LED reliability at nominal Ta = 25°C: 100.000h L80B10
Photobiological safety group: 0
Cd/Klm: 704

This product contains a light source of energy efficiency class B


Electronic Equipment

S: On/Off (AC/DC, NOT looping through capable)
SE: On/Off (AC/DC) + Battery 3h
D: DALI-2/switchDIM/corridorFUNCTION
DE: DALI-2/switchDIM+ 3 hours battery
DDE: DALI-2/switchDIM+ 3 hours battery (DALI)
B: Bluetooth-Casambi

*Add the suffix **-S, -SE, -D, -DE, -DDE, -B** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

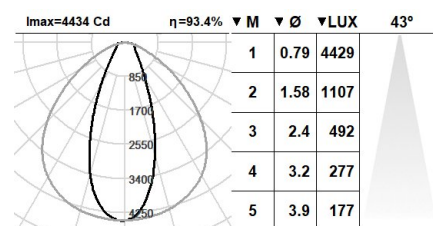**Upgradeable, Replaceable, Repairable****Note**

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 26.07.2025]

5 years guarantee

BSI Cert ISO 9001:2015 - n°FM 39346
 BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarrà
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com