
RIGEL 300





311RGL.01.00-I2173



Surface-mounted downlights with symmetrical light distribution to achieve an effective task or ambient liahtina.

Lampshade in diameter 370mm.

Silicone optic to control and direct the light.

Lampshade and aluminium body liquid painted with textured finish.

Select from a vast range of colours and finishes to perfectly customize your fittings. Whether you prefer a single colour or want to create a unique combination, we offer flexible options. You can choose a RAL colour for the exterior of your lampshade and pair it with various finishes for the interior. Removable lampshade that can be easily replaced with another design or finish.

Built-in driver, included.

Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM \leq 1 and SVM \leq 0.4.

Passive temperature management: heat dissipation flows through aluminium heat sink. Mounting to the ceiling plate with two securing holes. Cable entry from the top of the luminaire.

Luminaire luminous flux: 1597lm Imax=815 Cd Luminaire connected power: 17,1 W Luminaire efficiency: 93 lm/W Light source luminous flux: 2535lm Light source power: 15,43 W Constant Current: 500 mA CRI: >90 R9 72 Colour Temperature: 4000K Chromaticity Tolerance: MacAdam 3 Beam Angle: 86° LOR: 63% LED reliability at nominal Ta = 25°C: 60.000h L90B10 Photobiological safety group: 1 This product contains a light source of energy efficiency class D

Electronic Equipment

S: On/Off (AC/DC, NOT looping through capable) D: DALI-2/switchDIM/corridorFUNCTION

*Add the suffix -S, -D after the reference to indicate your electronic equipment choice.

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 06.08.2025]

5 years guarantee

BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.

Pol. Ind. La Gavarra

Spain

08540 Centelles | Barcelona

Contact Ronda de la Font Grossa, 15

T. +34 93 881 35 12 T. +34 93 881 37 13 info@rovasi.com www.rovasi.com



η=99.8% ▼M ▼Ø ▼LUX

1

2 3.8 204

3 5.6 91

4 7.5 51

5 9.4 33

150

300

450

600

1.88 815

86°

RIGEL Pendant downlights



Colour options

Lampshade and aluminium body liquid painted with textured finish. Select from a vast range of colours to perfectly customize your fittings.

One single colour



1: RAL9010 Pure White textured



15: RAL 2012 Salmon Orange textured



19: RAL 6018 Yellow Green textured



2: RAL9005 Jet Black textured



16: RAL 3000 Flame red textured



20: RAL 6000 Patina Green textured



13: RAL 1023 Traffic Yellow textured



17: RAL 5024 Pastel Blue textured



21: RAL 8001: Ochre Brown textured




14: RAL 1037 Sun Yellow textured



18: RAL 5003 Sapphire Blue textured



22: RAL8016 Mahogany Brown textured



ROVASI S.L.

Ronda de la Font Grossa, 15 Pol. Ind. La Gavarra 08540 Centelles | Barcelona Spain

T. +34 93 881 35 12 T. +34 93 881 37 13 info@rovasi.com www.rovasi.com

RIGEL Pendant downlights



Two colours combined / outer and inner

Select from a vast range of colours to perfectly customize your fittings. You can choose a RAL colour for the exterior of your lampshade and pair it with various finishes for the interior.

Inner finishes.



10: RAL 9010 Pure White



20: RAL9005 Jet Black



30: Golden



40: Copper

50: Silvered

Some inspirations.



1: RAL9010 Pure White textured 30: Golden



16: RAL 3000 Flame red textured 10: RAL9010 Pure White textured



20: RAL 6000 Patina Green textured 40: Copper



2: RAL9005 Jet Black textured 50: Silvered



2: RAL9005 Jet Black textured 40: Copper



21: RAL 8001: Ochre Brown textured 20: RAL9005 Jet Black textured



17: RAL 5024 Pastel Blue textured 50: Silvered



16: RAL 3000 Flame red textured 30: Golden



18: RAL 5003 Sapphire Blue textured 10: RAL9010 Pure White textured



20: RAL 6000 Patina Green textured 50: Silvered



15: RAL 2012 Salmon Orange textured 30: Golden



22: RAL8016 Mahogany Brown textured 30: Golden

СЕ BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.


Ronda de la Font Grossa, 15 Pol. Ind. La Gavarra 08540 Centelles | Barcelona Spain

T. +34 93 881 35 12 T. +34 93 881 37 13 info@rovasi.com www.rovasi.com

REFERENCE COMPOSITION




Structure of a standard reference:



Product Section | Luminaire with one single colour

### RGL .	## . 00
	This code is provided by ROVASI.
	This code is provided by ROVASI. 3 types concerning the product family name. RIGEL as RGL.
	Preceded with a ".", it specifies the fixture finishing for choosing from the list of the 12 standard finishes. The whole luminaire will be supplied in the specified colour.

Product Section | Luminaire with two colours combined: outer and inner

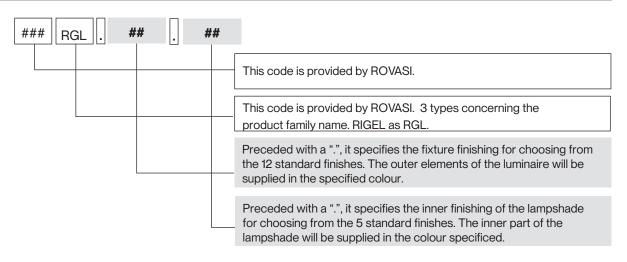

Light source and driver section

- I ### A	
	This code is provided by ROVASI. It gives information about the driver location. I: built-in, R: Remote, T: Track
	This code is provided by ROVASI. It refers to the light source.
	Electronic equipment options to choose as detailed in the data sheet. S: On/Off D: DALI-2/switchDIM B: Bluetooth- Casambi.

СЕ BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15 Pol. Ind. La Gavarra 08540 Centelles | Barcelona Spain

T. +34 93 881 35 12 T. +34 93 881 37 13 info@rovasi.com www.rovasi.com