# **ALNAIR**



η=99.9% ▼ M ▼ Ø ▼ LUX

2 2.5 294

3 3.7 130

4


1.24 1174

6.2 47

73 5.0

64°





#### 411ALN.01.00-R2072









Pendant downlights with symmetrical light distribution to achieve an effective task or ambient lighting. Lampshade in diameter 400mm.

Silicone optic to control and direct the light.

Lampshade and aluminium body liquid painted with textured finish.

Select from a vast range of colours and finishes to perfectly customize your fittings. Whether you prefer a single colour or want to create a unique combination, we offer flexible options. You can choose a RAL colour for the exterior of your lampshade and pair it with various finishes for the interior.

Removable lampshade that can be easily replaced with another design or finish.

Built-in driver, included,

Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM  $\leq$  1 and SVM  $\leq$  0.4.

Imax=1174 Cd

600

Passive temperature management: heat dissipation flows through aluminium heat sink.

Delivered with 1 meter steel cord suspension as standard and black electronic wire. Mounted to the ceiling with a recessed base with two fixing points..

Luminaire luminous flux: 1114lm Luminaire connected power: 17,1 W Luminaire efficiency: 65 lm/W Light source luminous flux: 2785lm Light source power: 15,43 W Constant Current: 500 mA

**CRI:** >80

Colour Temperature: 2700K

Chromaticity Tolerance: MacAdam 3

Beam Angle: 63° **LOR:** 40%

LED reliability at nominal Ta = 25°C: 60.000h L90B10

Photobiological safety group: 1

This product contains a light source of energy efficiency class D

#### **Electronic Equipment**

S: On/Off (AC/DC, NOT looping through capable)

D: DALI-2/switchDIM/corridorFUNCTION

B: Bluetooth-Casambi

\*Add the suffix -S, -D, -B after the reference to indicate your electronic equipment choice.

#### Upgradeable, Replaceable, Repairable





Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 26.07.2025]

5 years guarantee



BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685 **ROVASIS.L.** 

Spain

Ronda de la Font Grossa, 15 Pol. Ind. La Gavarra 08540 Centelles | Barcelona Contact

T. +34 93 881 35 12

info@rovasi.com www.rovasi.com

T. +34 93 881 37 13



#### ROVASI Positive Lighting

### **Colour options**

Lampshade and aluminium body liquid painted with textured finish. Select from a vast range of colours to perfectly customize your fittings.

# One single colour



1: RAL9010 Pure White textured



2: RAL9005 Jet Black textured



13: RAL 1023 Traffic Yellow textured



14: RAL 1037 Sun Yellow textured



15: RAL 2012 Salmon Orange textured



16: RAL 3000 Flame red textured



17: RAL 5024 Pastel Blue textured



18: RAL 5003 Sapphire Blue textured



19: RAL 6018 Yellow Green textured



20: RAL 6000 Patina Green textured



21: RAL 8001: Ochre Brown textured



22: RAL8016 Mahogany Brown textured

# ALNAIR Pendant downlights



#### Two colours combined / outer and inner

Select from a vast range of colours to perfectly customize your fittings. You can choose a RAL colour for the exterior of your lampshade and pair it with various finishes for the interior.

#### Inner finishes.



10: RAL 9010 Pure White



20: RAL9005 Jet Black



30: Golden



40: Copper



50: Silvered

#### Some inspirations.



1: RAL9010 Pure White textured 30: Golden



2: RAL9005 Jet Black textured 50: Silvered



17: RAL 5024
Pastel Blue textured
50: Silvered



20: RAL 6000 Patina Green textured 50: Silvered



16: RAL 3000 Flame red textured 10: RAL9010 Pure White textured



2: RAL9005 Jet Black textured 40: Copper



16: RAL 3000 Flame red textured 30: Golden



15: RAL 2012 Salmon Orange textured 30: Golden



20: RAL 6000 Patina Green textured 40: Copper



21: RAL 8001: Ochre Brown textured 20: RAL9005 Jet Black textured



18: RAL 5003 Sapphire Blue textured 10: RAL9010 Pure White textured




22: RAL8016 Mahogany Brown textured 30: Golden


# REFERENCE COMPOSITION




#### Structure of a standard reference:



# Product Section | Luminaire with one single colour

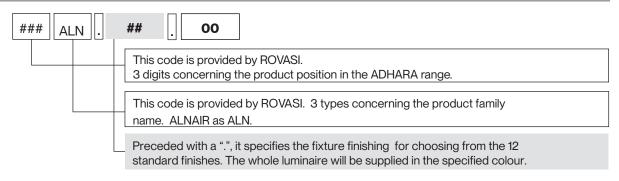

#### Product Section | Luminaire with two colours combined: outer and inner

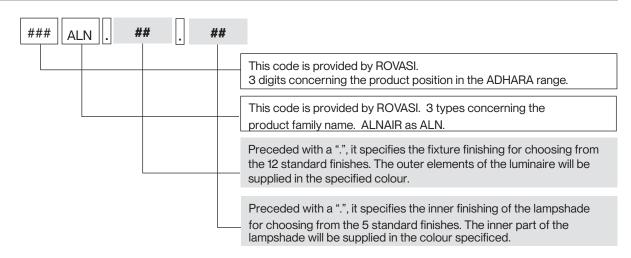

#### Light source and driver section

