CAPELLA

Pendant downlights

ROVASI
Positive Lighting

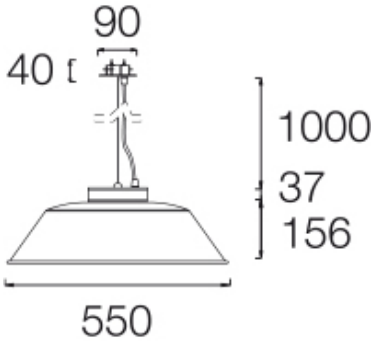

411CPL.01.00-R2069



Pendant downlights with symmetrical light distribution to achieve an effective task or ambient lighting.
Lampshade in diameter 550mm.
Silicone optic to control and direct the light.
Lampshade and aluminium body liquid painted with textured finish.
Select from a vast range of colours and finishes to perfectly customize your fittings. Whether you prefer a single colour or want to create a unique combination, we offer flexible options. You can choose a RAL colour for the exterior of your lampshade and pair it with various finishes for the interior.
Removable lampshade that can be easily replaced with another design or finish.
Built-in driver, included.
Electronic options for lighting control: DALI-2.
The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM ≤ 1 and SVM ≤0,4.
Luminaire designed according to ecodesign principles, with replaceable light source and driver, to enable upgrades, ease maintenance and extend the product lifecycle.
Passive temperature management: heat dissipation flows through aluminium heat sink.
Delivered with 1 meter steel cord suspension as standard and black electronic wire. Mounted to the ceiling with a recessed base with two fixing points..

Luminaire luminous flux: 972lm
Luminaire connected power: 11,9 W
Luminaire efficiency: 82 lm/W
Light source luminous flux: 1620lm
Light source power: 10,66 W
Constant Current: 350 mA
CRI: >90 R9 62
Colour Temperature: 2700K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 71º
LOR: 60%
LED reliability at nominal Ta = 25ºC: 60.000h L90B10
Photobiological safety group: 1
This product contains a light source of energy efficiency class E

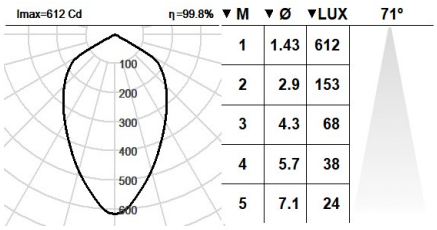

▼M	▼Ø	▼LUX	71°
1	1.43	612	
2	2.9	153	
3	4.3	68	
4	5.7	38	
5	7.1	24	

Electronic Equipment
S: On/Off (AC/DC, NOT looping through capable)
D: DALI-2/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi

*Add the suffix **-S, -D, -B** after the reference to indicate your electronic equipment choice.

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 22.01.2026]

5 years guarantee

CE

BSI Cert ISO 9001:2015 - nºFM 39346
BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact
T. +34 93 881 35 12
T. +34 93 881 37 13
info@rovasi.com
www.rovasi.com

CAPELLA
Pendant downlights

ROVASI
Positive Lighting

Colour options

Lampshade and aluminium body liquid painted with textured finish.
Select from a vast range of colours to perfectly customize your fittings.

One single colour

1: RAL9010
Pure White textured

2: RAL9005
Jet Black textured

13: RAL 1023
Traffic Yellow textured

14: RAL 1037
Sun Yellow textured

15: RAL 2012
Salmon Orange textured

16: RAL 3000
Flame red textured

17: RAL 5024
Pastel Blue textured

18: RAL 5003
Sapphire Blue textured

19: RAL 6018
Yellow Green textured

20: RAL 6000
Patina Green textured

21: RAL 8001:
Ochre Brown textured

22: RAL8016
Mahogany Brown textured

CE

BSI Cert ISO 9001:2015 - nºFM 39346
BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

T. +34 93 881 35 12
T. +34 93 881 37 13

info@rovasi.com
www.rovasi.com

CAPELLA
Pendant downlights

ROVASI
Positive Lighting

Two colours combined / outer and inner

Select from a vast range of colours to perfectly customize your fittings. You can choose a RAL colour for the exterior of your lampshade and pair it with various finishes for the interior.

Inner finishes.

10: RAL 9010
Pure White

20: RAL9005
Jet Black

30: Golden

40: Copper

50: Silvered

Some inspirations.

1: RAL9010
Pure White textured
30: Golden

2: RAL9005
Jet Black textured
50: Silvered

17: RAL 5024
Pastel Blue textured
50: Silvered

20: RAL 6000
Patina Green textured
50: Silvered

16: RAL 3000
Flame red textured
10: RAL9010
Pure White textured

2: RAL9005
Jet Black textured
40: Copper

16: RAL 3000
Flame red textured
30: Golden

15: RAL 2012
Salmon Orange textured
30: Golden

20: RAL 6000
Patina Green textured
40: Copper

21: RAL 8001:
Ochre Brown textured
20: RAL9005
Jet Black textured

18: RAL 5003
Sapphire Blue textured
10: RAL9010
Pure White textured

22: RAL8016
Mahogany Brown textured
30: Golden

CE

BSI Cert ISO 9001:2015 - nºFM 39346
BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

T. +34 93 881 35 12
T. +34 93 881 37 13

info@rovasi.com
www.rovasi.com

REFERENCE COMPOSITION

ROVASI
Positive Lighting

Structure of a standard reference:

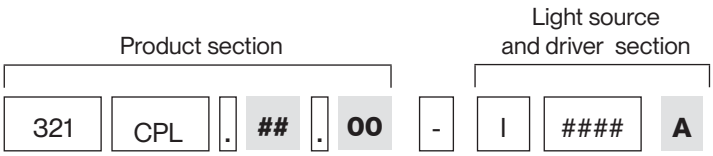

Product Section | Luminaire with one single colour

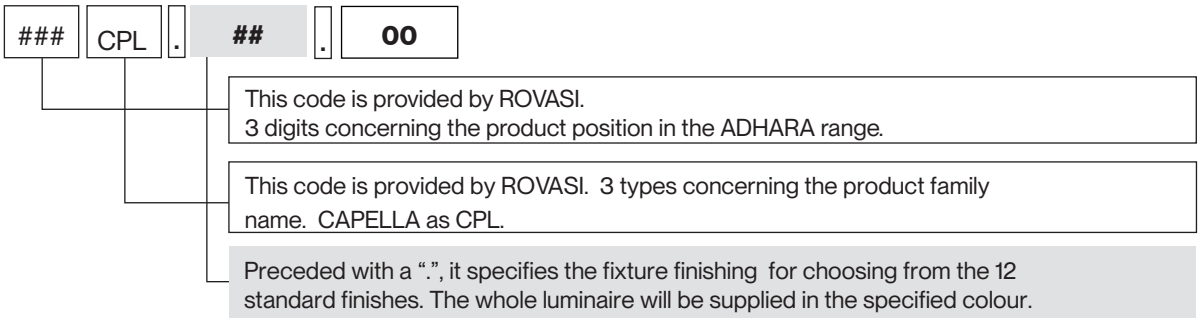

Product Section | Luminaire with two colours combined: outer and inner

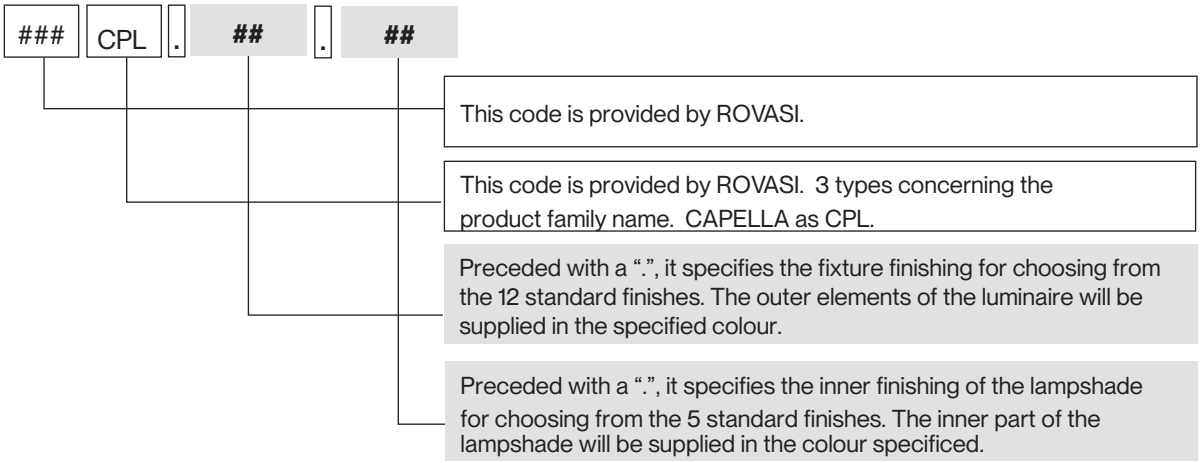

Light source and driver section

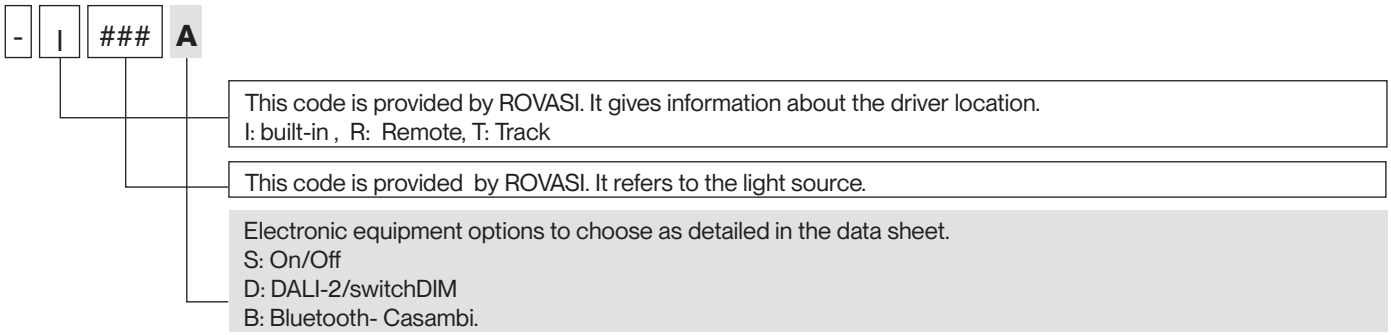

CE

BSI Cert ISO 9001:2015 - nºFM 39346
BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain
T. +34 93 881 35 12
T. +34 93 881 37 13
info@rovasi.com
www.rovasi.com