

## 110GRV.1-I869



Pendant downlight with symmetrical light distribution to achieve an effective task, accent or ambient lighting.

Neutral cylindrical body in diameter 240mm.

Double Aluminium reflectors in assorted finishes. Top reflector: faceted metalized or sandblasted metalized depending on the beam angle outcome. Bottom reflector: sandblasted metalized.

Powder painted aluminium body available in assorted finishes, customized RAL under request.

Flush glass accessory available [reference M2.L0240]. Complete IP54 | IK05 fixture by ordering flush glass and IP rated connector accessories [reference F3.A3 (On/Off) / F3.A5 (DALI) ].

Drop glass disk accessory available in assorted colours [reference M1.A0240].

Drop metal disk accessory available in assorted colours [reference M1.B0240].

Built-in driver, included.

Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM  $\leq 1$  and SVM  $\leq 0.4$ .

Passive temperature management: heat dissipation flows through an aluminium heat sink and the fixture body itself.

Delivered with 1meter powder painted metal rod as standard.

Mounted to the ceiling by cylindrical ceiling rose.

For a more dynamic result, it can be supplied with an adapter for three-phase track [accessory reference M3.A].

GRAVITY can be combined with the BASE surface-mounted line to achieve a uniform effect.

**Luminaire luminous flux:** 1846lm  
**Luminaire connected power:** 18.33 W  
**Luminaire efficiency:** 101 lm/W  
**Light source luminous flux:** 2755lm  
**Light source power:** 17 W  
**Constant Current:** 500 mA  
**CRI:** >80  
**Colour Temperature:** 2700K  
**Chromaticity Tolerance:** MacAdam 3  
**Beam Angle:** 24°  
**LOR:** 67%  
**Average Service Life:** 50000h  
**LED reliability:** 50000h L90B10  
**UGR:** <16  
**Photobiological safety group:** 1  
**Cd/Klm:** 2549  
**Imax:** 7022 Cd

**This product contains a light source of energy efficiency class D**

### Electronic Equipment



**S:** On/Off (AC/DC)  
**D:** DALI-2/switchDIM/corridorFUNCTION  
**B:** Bluetooth-Casambi

\*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

### Finishes

**1:** RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

### Upgradeable, Replaceable, Repairable

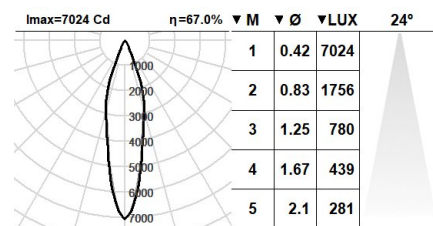

### Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 09.05.2025]

### 5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346  
 BSI Cert ISO 14001:2015 - n°EMS 554685

### ROVASI S.L.

Ronda de la Font Grossa, 15  
 Pol. Ind. La Gavarra  
 08540 Centelles | Barcelona  
 Spain

### Contact

T. +34 93 881 35 12 info@rovasi.com  
 T. +34 93 881 37 13 [www.rovasi.com](http://www.rovasi.com)