



108RCK.1-I912



Wall mounted luminaires with symmetrical light distribution to achieve an effective task or general lighting. Neutral cylindrical body in diameter 80mm. Sandblasted metalized aluminium reflector silver finished. Powder painted aluminium profile available in assorted finishes, customized RAL under request. Built-in driver, included. Electronic options for lighting control: DALI-2. Passive temperature management: heat dissipation flows through an aluminium heat sink and the fixture body itself. Wall mounted by aluminium mounting plate with two fixing points. Cable entry through the aluminium wall mounting plate. ROCKET can be combined with the KERI pendant line and the GOTA surface mounted fixtures to get a harmonious finish.

Luminaire luminous flux: 719lm
Luminaire connected power: 6.5 W
Luminaire efficiency: 111 lm/W
Light source luminous flux: 1160lm
Constant Current: 200 mA
CRI: >80
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 38°
LOR: 62%
Average Service Life: 50000h
LED reliability: 55000h L80B10
Photobiological safety group: 1
Cd/Klm: 1077
Imax: 1249 Cd

This product contains a light source of energy efficiency class A++


Electronic Equipment

D: DALI-2/switchDIM/corridorFUNCTION


*Add the suffix **-D** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

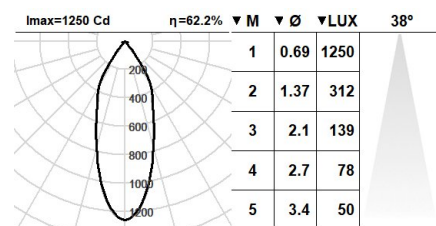

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 02.05.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
 BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarrà
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com