


CUMULUS EVOLUTION

Pendant downlights

ROVASI
Positive Lighting



101CEV.1.02-I865



Pendant downlight with symmetrical light distribution to achieve an effective task or ambient lighting. Neutral cylindrical body in diameter 150mm.

White painted aluminium reflector. Sandblasted metalized aluminium reflector available as option.

Powder painted aluminium body available in assorted finishes, customized RAL under request.

Intermediate tempered frosted glass .

Integral driver supplied.

Electronic options for lighting control: DALI-2.

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker limits: PstLM \leq 1 and SVM \leq 0.4.

Passive temperature management: heat dissipation flows through aluminium heat sink and the fixture body itself.

Suspended 1 meter by three steel cords. Transparent electrical wire.

Mounted to the ceiling by cylindrical ceiling rose.

Optional complete IP54 if the fixture is supplied with black wire.

Luminaire luminous flux: 1254lm
Luminaire connected power: 12.61 W
Luminaire efficiency: 99 lm/W
Light source luminous flux: 2125lm
Light source power: 11 W
Constant Current: 350 mA
CRI: >80

Colour Temperature: 4000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 63°

LOR: 59%
Average Service Life: 50000h
LED reliability: 50000h L90B10
UGR: <19 under the below indicated parameters
 Room dimensions X=4H/8H
 Reflectance 20% | 50% | 70%
 Luminaire spacing = 0.55m

Photobiological safety group: 1
Cd/Klm: 819

This product contains a light source of energy efficiency class D


Electronic Equipment

S: On/Off (AC/DC)
D: DALI-2/switchDIM/corridorFUNCTION
B: Bluetooth-Casambi


*Add the suffix **-S**, **-D**, **-B** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

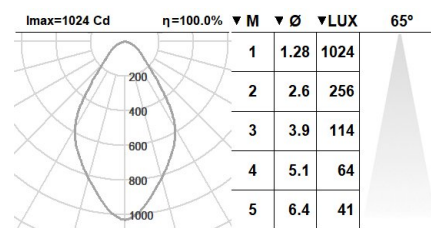

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 21.09.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
 BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarra
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com