

HORIZON 400 IP20 Pendant linear downlights







481HRN.1-1986

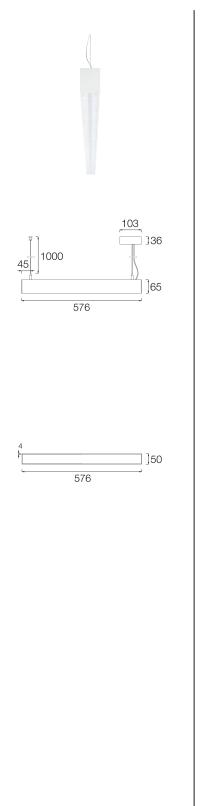

Pendant linear downlights with asymmetrical light distribution to achieve an effective task or accent lighting.

Linear fixture in 576mm length and in a width of 50mm.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request. PMMA optic to achieve specific photometric results.

Highly efficient linear printed circuit board.

Accessories available to create customized linear systems.

Built-in driver, included.


Electronic options for lighting control: DALI-2.

Passive temperature management.

Ceiling-mounted with adjustable steel wire suspension (1m) and transparent electrical wire. Different suspension length on request.

It is possible to combine different lengths and junction modules in different ways to create customized design.

Luminaire luminous flux: 2664lm Luminaire connected power: 23.25 W Luminaire efficiency: 115 lm/W Light source luminous flux: 3210lm Light source power: 20 W Constant Current: 700 mA **CRI:** 80 Colour Temperature: 3000K Chromaticity Tolerance: MacAdam 3 Beam Angle: ASYº LOR: 83% Average Service Life: 50000h LED reliability: >54000h L80B10 **UGR:** <19



This product contains a light source of energy efficiency class C

Electronic Equipment

Cd/Klm: 974 Imax: 3127 Cd

S: On/Off (AC/DC) D: DALI-2/switchDIM/corridorFUNCTION B: Bluetooth-Casambi

Photobiological safety group: 1

*Add the suffix -S, -D, -B after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, 4: RAL7016: Anthracite Grey, 7: RAL9006: White Aluminium, 1: RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 03.05.2024]

5 years guarantee BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.

Pol. Ind. La Gavarra

Spain

08540 Centelles | Barcelona

Contact Ronda de la Font Grossa, 15

T. +34 93 881 35 12 T. +34 93 881 37 13 info@rovasi.com www.rovasi.com