
GOWEL 400 IP20 Pendant linear downlights





401GWL.1-I741

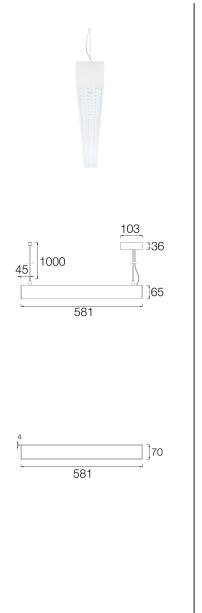

Pendant linear downlights with symmetrical light distribution to achieve an effective task or general lighting.

Linear fixture in 581mm length and in a width of 70mm.

Powder painted extruded aluminium profile available in assorted finishes, customized RAL under request. Range of PMMA optics to achieve specific photometric results.

Highly efficient linear printed circuit board.

Accessories available to create customized linear systems.

Built-in driver, included.


Electronic options for lighting control: DALI-2.

Passive temperature management.

Ceiling-mounted with adjustable steel wire suspension (1m) and transparent electrical wire. Different suspension length on request.

It is possible to combine different lengths and junction modules in different ways to create customized systems.

Luminaire luminous flux: 1583lm Luminaire connected power: 11.84 W Luminaire efficiency: 134 lm/W Light source luminous flux: 1740lm Light source power: 9 W Constant Current: 150 mA **CRI:** 80 Colour Temperature: 5000K Chromaticity Tolerance: MacAdam 3 Beam Angle: 17° LOR: 91% Average Service Life: 50000h LED reliability: >54000h L80B10 **UGR:** <19 Photobiological safety group: 1 Cd/Klm: 6350 Imax: 11049 Cd



This product contains a light source of energy efficiency class C

Electronic Equipment S: On/Off

D: DALI-2/switchDIM/corridorFUNCTION

*Add the suffix -S, -D after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, 4: RAL7016: Anthracite Grey, 7: RAL9006: White Aluminium, 1: RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 02.05.2024]

5 years guarantee

BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L. Ronda de la Font Grossa, 15

Pol. Ind. La Gavarra

Spain

08540 Centelles | Barcelona

Contact

T. +34 93 881 35 12 T. +34 93 881 37 13 info@rovasi.com www.rovasi.com