


118CNC.1-R1096



Recessed ceiling-mounted small downlight with symmetrical light distribution to achieve an effective task.
3 hours battery available as option.

Passive temperature management: heat dissipation flows through an aluminium heat sink diffuser.
Ceiling-mounted by spring clamps for easy installation, ceiling thickness up to 25mm.

Luminaire luminous flux: 1313lm
Luminaire connected power: 17.05 W
Luminaire efficiency: 77 lm/W
Light source luminous flux: 1960lm
Light source power: 15.4 W
Constant Current: 450 mA
CRI: >90
Colour Temperature: 2700K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 21°
LOR: 67%
Average Service Life: 50000h
LED reliability: 50.000h L90B10
UGR: <19 under the below indicated parameters
 Room dimensions X=4H/8H
 Reflectance 20% | 50% | 70%
 Luminaire spacing = 0.3m
Photobiological safety group: 1

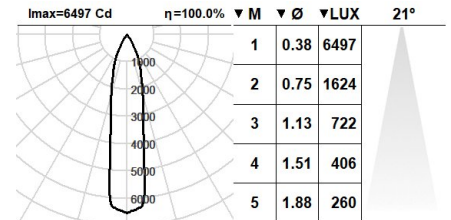

This product contains a light source of energy efficiency class E

Electronic Equipment


K: On/Off (basic)
S: On/Off (AC/DC)
SE: On/Off (AC/DC) + Battery 3h
D: DALI-2/switchDIM/corridorFUNCTION
DE: DALI-2/switchDIM + 3h battery
B: Bluetooth-Casambi

*Add the suffix **-K, -S, -SE, -D, -DE, -B** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

Upgradeable, Replaceable, Repairable

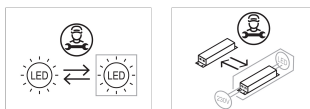

Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 03.05.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
 BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
 Pol. Ind. La Gavarra
 08540 Centelles | Barcelona
 Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
 T. +34 93 881 37 13 www.rovasi.com