
TEKNU Minidownlights





103TNS.1-R709

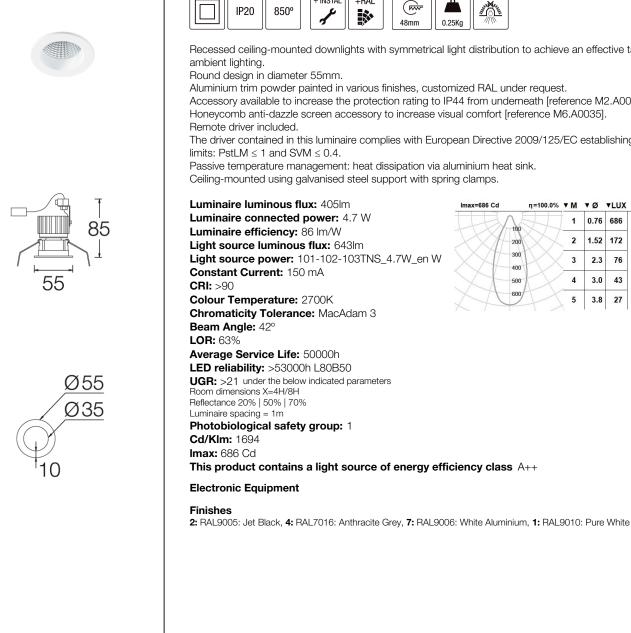

+RAL

+ INSTAL

Recessed ceiling-mounted downlights with symmetrical light distribution to achieve an effective task or

Accessory available to increase the protection rating to IP44 from underneath [reference M2.A0035]. Honeycomb anti-dazzle screen accessory to increase visual comfort [reference M6.A0035].

The driver contained in this luminaire complies with European Directive 2009/125/EC establishing flicker

Passive temperature management: heat dissipation via aluminium heat sink.

η=100.0% ▼Μ ▼Ø ▼LUX 42° 0.76 1 686 100 2 1.52 172 200 300 3 2.3 76 400 4 43 3.0 500 600 27 5 3.8

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 19.09.2024]

Spain

5 years guarantee BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15 Pol. Ind. La Gavarra

08540 Centelles | Barcelona

Contact

T. +34 93 881 35 12 T. +34 93 881 37 13 info@rovasi.com www.rovasi.com