


110LDA.1.02-I1059



Surface-mounted downlights with symmetrical light distribution to achieve an effective ambient lighting. Circular design available in 835mm diameter.
Powder painted one piece aluminium profile available in assorted finishes, customized RAL under request.
PMMA opal diffuser (thickness 3mm.).
Tridonic high energy efficiency printed circuit board.
Built-in driver, included.
Electronic standard options for lighting control: DALI/DSI.
3 hours battery available as option (change of size required).
Passive temperature management: heat dissipation flows through the fixture body itself.
Mounting to the ceiling plate with four securing points. Cable entry from the top of the fixture.
LEDA can be combined with PLACE pendant downlights and KUJ and CANDRA recessed downlights to get a harmonious finish.

Light source power: 59 W
Fixture power: 64.93 W
Constant Current: 500 mA
Luminous flux of the light source: 11170lm
Luminous flux of the fixture: 9940lm
CRI: >80
Colour Temperature: 3000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 108°
LOR: 89%
Average Service Life: 50000h
LED reliability: L90B10 >50000h
UGR: <19 under the below indicated parameters
Room dimensions X=4H/8H
Reflectance 20% | 50% | 70%
Luminaire spacing = 0.4m
Photobiological safety group: 1
Luminous efficacy: 153 lm/W
This product contains a light source of energy efficiency class C

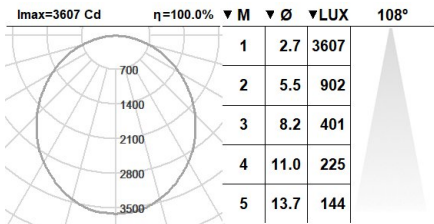

Electronic Equipment

S: On/Off
SE: On/Off + 3h battery
D: DALI-2/DSI switchDIM/corridorFUNCTION
DE: DALI/DSI switchDIM+ 3 hours battery
DDE: DALI/DSI switchDIM+ 3 hours battery (DALI)

*Add the suffix **-S, -SE, -D, -DE, -DDE** after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 20.04.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact
T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com