


110PLC.1.02-I1058



Pendant downlights with symmetrical light distribution to achieve an effective ambient lighting.
Circular design available in 835mm diameter.
Powder painted one piece aluminium profile available in assorted finishes, customized RAL under request.
PMMA opal diffuser (thickness 3mm.).
Tridonic high energy efficiency printed circuit board.
Built-in driver, included.
Electronic options for lighting control: DALI/DSI.
Emergency kit as option (change of size required).
Passive temperature management: heat dissipation flows through the fixture body itself.
Ceiling-mounted using ceiling rose. Suspended 1 meter by four steel cords. Transparent electronic wire.
PLACE can be combined with KUU and CANDRA recessed downlights and LEDA surface-mounted downlights to get a harmonious finish.

Light source power: 47 W
Fixture power: 51.32 W
Constant Current: 400 mA
Luminous flux of the light source: 9555lm
Luminous flux of the fixture: 8506lm
CRI: >80
Colour Temperature: 4000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 108°
LOR: 89%
Average Service Life: 50000h
LED reliability: L90B10 >50000h
UGR: <16 under the below indicated parameters
Room dimensions X=4H/8H
Reflectance 20% | 50% | 70%
Luminaire spacing = 1m
Photobiological safety group: 1
Luminous efficacy: 166 lm/W
This product contains a light source of energy efficiency class C

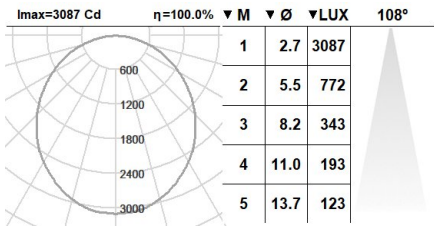


Electronic Equipment

S: On/Off
D: DALI-2/DSI/switchDIM
SE: On/Off + 3 hours battery
DE: DALI-2/DSI/switchDIM+3 hours battery
DDE: DALI-2/DSI/switchDIM+3 hours battery (DALI)
There are available accessories for dimming devices.
*Add the suffix **-S, -D, -SE, -DE, -DDE** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 28.03.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact
T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com