


109TOP.1.02-I1052



Pendant downlights with symmetrical light distribution to achieve an effective ambient lighting.
Circular design in 553mm diameter.
Powder painted aluminium profile available in assorted finishes, customized RAL under request.
PMMA opal diffuser (thickness 3mm.)
Tridonic high energy efficiency printed circuit board.
Built-in driver, included.
Electronic options for lighting control: DALI/DSI.
Emergency kit as option (change of size required).
Passive temperature management: heat dissipation flows through the fixture body itself.
Delivered with a short powder painted metal rod, custom made length up to 1000mm, minimum 300mm. Mounted to the ceiling by cylindrical ceiling rose.
TOP can be combined with the LEDA surface-mounted fixtures and KUU and CANDRA recessed mounted lines to get an harmonious finish.

Light source power: 17 W
Fixture power: 19.1 W
Constant Current: 150 mA
Luminous flux of the light source: 3480lm
Luminous flux of the fixture: 3028lm
CRI: >80
Colour Temperature: 4000K
Chromaticity Tolerance: MacAdam 3
Beam Angle: 106°
LOR: 87%
Average Service Life: 50000h
LED reliability: L90B10 >50000h
UGR: <19 under the below indicated parameters
Room dimensions X=4H/8H
Reflectance 20% | 50% | 70%
Luminaire spacing = 0.35m
Photobiological safety group: 1
Luminous efficacy: 159 lm/W
This product contains a light source of energy efficiency class C

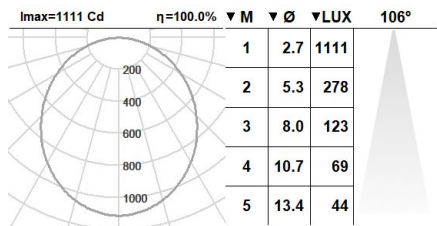


Electronic Equipment

S: On/Off
D: DALI-2/DSI/switchDIM
SE: On/Off + 3 hours battery
DE: DALI-2/DSI/switchDIM+3 hours battery
DDE: DALI-2/DSI/switchDIM+3 hours battery (DALI)
There are available accessories for dimming devices.
*Add the suffix **-S, -D, -SE, -DE, -DDE** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 28.03.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346
BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.
Ronda de la Font Grossa, 15
Pol. Ind. La Gavarrà
08540 Centelles | Barcelona
Spain

Contact
T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com