



## 101QDM.1-R866



Recessed ceiling-mounted downlight with symmetrical light distribution to achieve an effective task or general lighting.

Square frameless design for plasterboard ceilings available in 180mm x 180mm.

Powder painted aluminium frame available in assorted finishes, customized RAL under request. To complete the effect of this fixture, it is also recommended that the inner shade should be painted the same RAL colour as the ceiling.

High-purity matt anodised aluminium reflector to obtain the best photometric results.

Remote driver supplied.

Electronic options for lighting control: DALI-2.

3 hours battery available as option (class I).

Passive temperature management: heat dissipation flows through aluminium heatpipes.

Ceiling-mounted using galvanised steel support with screws, ceiling thickness up to 30mm.

**Light source power:** 11 W  
**Luminaire connected power:** 12.61 W  
**Constant Current:** 350 mA  
**Light source luminous flux:** 1620lm  
**Luminaire luminous flux:** 1069lm  
**CRI:** >90  
**Colour Temperature:** 2700K  
**Chromaticity Tolerance:** MacAdam 3  
**Beam Angle:** 63°  
**LOR:** 66%

**Average Service Life:** 50000h

**LED reliability:** 50000h L90B10

**UGR:** <19 under the below indicated parameters

Room dimensions X=4H/8H

Reflectance 20% | 50% | 70%

Luminaire spacing = 0.3m

**Photobiological safety group:** 1

**Cd/Klm:** 595

**Luminaire efficiency:** 85 lm/W

**Imax:** 964 Cd

**This product contains a light source of energy efficiency class E**

### Electronic Equipment

**K:** On/Off (basic)

**S:** On/Off (AC/DC + looping through)

**SE:** On/Off (AC/DC+looping) + 3h battery

**D:** DALI-2/switchDIM/corridorFUNCTION


**DE:** DALI-2/switchDIM/corridorFUNCTION + Battery 3h

**B:** Bluetooth-Casambi

\*Add the suffix **-K, -S, -SE, -D, -DE, -B** after the reference to indicate your electronic equipment choice.

### Finishes

**2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium, **1:** RAL9010: Pure White

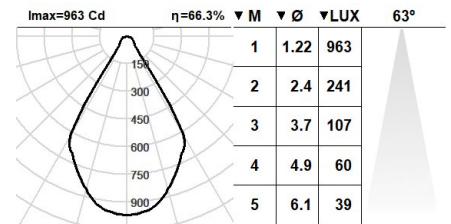

### Upgradeable, Replaceable, Repairable



### Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 26.04.2024]

### 5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

### ROVASI S.L.

Ronda de la Font Grossa, 15  
 Pol. Ind. La Gavarra  
 08540 Centelles | Barcelona  
 Spain

### Contact

T. +34 93 881 35 12  
 T. +34 93 881 37 13

info@rovasi.com  
[www.rovasi.com](http://www.rovasi.com)