


101TRG.1-R876



Recessed ceiling-mounted downlights with symmetrical light distribution to achieve an effective task or general lighting.

Triangular design in 216mm side.

Protection rating against dust and moisture: IP54 from underneath.

High-purity matt anodised aluminium reflector.

Powder painted aluminium frame available in assorted finishes, customized RAL under request.

Frosted protection glass.

Remote driver included.

Electronic options for lighting control: DALI/DSI.

Emergency kit as option (class I).

Passive temperature management: heat dissipation flows through an aluminium heat sink.

Ceiling-mounted using galvanised steel support with screws, ceiling thickness up to 30mm.

Light source power: 24 W

Fixture power: 26.2 W

Constant Current: 700 mA

Luminous flux of the light source: 3935lm

Luminous flux of the fixture: 2204lm

CRI: >80

Colour Temperature: 3000K

Chromaticity Tolerance: MacAdam 3

Beam Angle: 82°

LOR: 56%

Average Service Life: 50000h


LED reliability: 50000h L90B10

UGR: >22

Photobiological safety group: 1

Luminous efficacy: 84 lm/W

This product contains a light source of energy efficiency class D

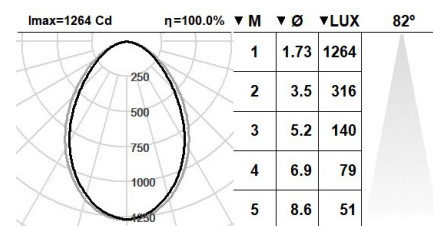

Electronic Equipment

S: On/Off (AC/DC + looping)

K: On/Off (basic)

D: DALI-2/DSI/switchDIM/corridorFUNCTION

B: Bluetooth-Casambi

SE: On/Off (AC/DC + looping) + 3 hours battery (class I)

DE: DALI-2/DSI/switchDIM/corridorFUNCTION + 3 hours battery (class I)


There are accessories available for dimming devices.

*Add the suffix **-S, -K, -D, -B, -SE, -DE** after the reference to indicate your electronic equipment choice.

Finishes

1: RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 28.03.2024]

5 years guarantee



BSI Cert ISO 9001:2015 - n°FM 39346

BSI Cert ISO 14001:2015 - n°EMS 554685

ROVASI S.L.

Ronda de la Font Grossa, 15
Pol. Ind. La Gavarra
08540 Centelles | Barcelona
Spain

Contact

T. +34 93 881 35 12 info@rovasi.com
T. +34 93 881 37 13 www.rovasi.com