

### 101HEX.1-I881



Pendant downlight with symmetrical light distribution to achieve an effective task or ambient lighting.

**Light source power:** 23 W  
**Fixture power:** 25.33 W  
**Constant Current:** 700 mA  
**Luminous flux of the light source:** 3900lm  
**Luminous flux of the fixture:** 2964lm  
**CRI:** >80  
**Colour Temperature:** 2700K  
**Chromaticity Tolerance:** MacAdam 3  
**Beam Angle:** 53°  
**LOR:** 76%  
**Average Service Life:** 50000h  
**LED reliability:** 50000h L90B10  
**UGR:** <16  
**Photobiological safety group:** 1  
**Cd/Klm:** 944  
**Luminous efficacy:** 117 lm/W  
**Imax:** 3682 Cd

**This product contains a light source of energy efficiency class D**

#### Electronic Equipment

**S:** On/Off


**D:** DALI-2/DSI/switchDIM

There are accessories available for dimming devices.


\*Add the suffix **-S**, **-D** after the reference to indicate your electronic equipment choice.

#### Finishes

**1:** RAL9010: Pure White, **2:** RAL9005: Jet Black, **4:** RAL7016: Anthracite Grey, **7:** RAL9006: White Aluminium

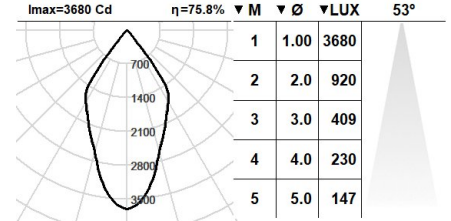

#### Upgradeable, Replaceable, Repairable



#### Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 28.03.2024]

**5 years guarantee**



BSI Cert ISO 9001:2015 - n°FM 39346  
 BSI Cert ISO 14001:2015 - n°EMS 554685

#### ROVASI S.L.

Ronda de la Font Grossa, 15  
 Pol. Ind. La Gavarrà  
 08540 Centelles | Barcelona  
 Spain

#### Contact

T. +34 93 881 35 12 info@rovasi.com  
 T. +34 93 881 37 13 [www.rovasi.com](http://www.rovasi.com)