
ROCKET Wall mounted fixtures



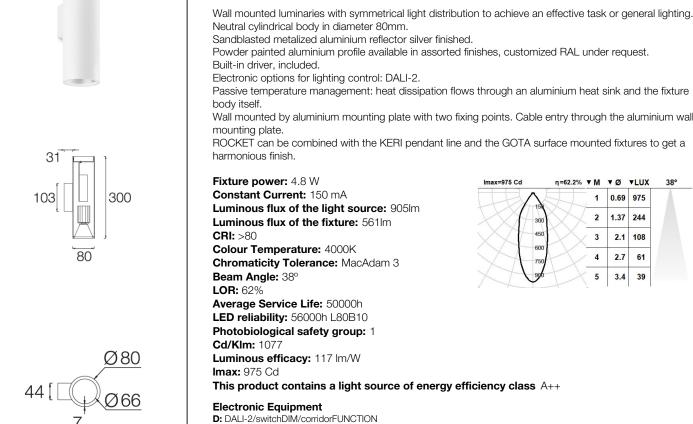

107RCK.1-I907

IP20

850°

+RAL

1.7Kg

lmax=975 Cd	η=62.2%	▼ M	٧Ø	▼LUX	38°
\wedge		1	0.69	975	
XA.	300	2	1.37	244	
$\times \times / $	150	3	2.1	108	
	500	4	2.7	61	
	30	5	3.4	39	

*Add the suffix -D after the reference to indicate your electronic equipment choice.

Finishes

2: RAL9005: Jet Black, 4: RAL7016: Anthracite Grey, 7: RAL9006: White Aluminium, 1: RAL9010: Pure White

Upgradeable, Replaceable, Repairable



Note

LED technology and performance data are constantly changing. Current details should therefore be checked with ROVASI in order to ensure that it is still the most up to date reference. Updated data will be supplied on request. [Last revised on 24.04.2024]

5 years guarantee BSI Cert ISO 9001:2015 - nºFM 39346 BSI Cert ISO 14001:2015 - nºEMS 554685

ROVASI S.L.

Pol. Ind. La Gavarra

Spain

Ronda de la Font Grossa, 15

08540 Centelles | Barcelona

Contact

T. +34 93 881 35 12 T. +34 93 881 37 13 info@rovasi.com www.rovasi.com

Passive temperature management: heat dissipation flows through an aluminium heat sink and the fixture

Wall mounted by aluminium mounting plate with two fixing points. Cable entry through the aluminium wall

ROCKET can be combined with the KERI pendant line and the GOTA surface mounted fixtures to get a